
3M[™] 4-Wall, Tripolarized Header

.050" × .100" Latch/Ejector, PTH & SMT Straight, PTH Right Angle

810 Series

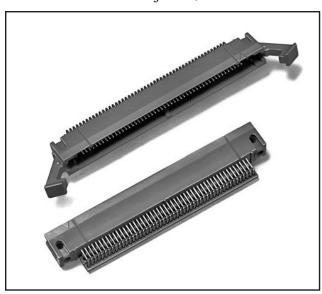

- Tripolarized to help prevent damage when mating to 820 Series socket
- 50 mil × 100 mil halves the connector length vs. traditional 100 mil x 100 mil products
- Latching Ejector for rugged high performance applications
- Available for through hole or surfacemount attachment
- High temperature plastic for lead free surfacemount or Paste-in-Hole soldering methods
- Four-wall shroud provides contact protection
- Contacts: 20, 26, 36, 40, 50, 60, 68, 80 and 100
- See the Regulatory Information Appendix (RIA) in the "RoHS compliance" section of www.3Mconnector.com for compliance information

Date Modified: July 5, 2010

TS-0253-F Sheet 1 of 7

Physical

Insulation:

Material: High Temperature Plastic (LCP)

Flammability: UL 94V-0

Color: Black (RB Plating only) or Natural

Contact:

Material: Copper Alloy

Plating:

Underplating: 100μ " [2.54 mm] Nickel Wiping Area: 30μ " [0.76 mm] Gold

Solder Tails: Matte Tin or Tin Lead (See Ordering Information)

Marking: 3M Logo, Part Number and Orientation Triangle

Mating Compatibility: 820 Series (TS-0254)

Electrical

Current Rating: 0.5 A

Insulation Resistance: $> 1 \times 10^9 \Omega$ at $500 V_{DC}$ **Withstanding Voltage:** $500 V_{RMS}$ at Sea Level

Environmental


Temperature Rating: -55°C to +105°C

Process Rating: Maximum 260°C (Profile per J-STD-020C)


Moisture Sensitivity Level: 1 (per J-STD-020C)

UL File No.: E68080

810 Series

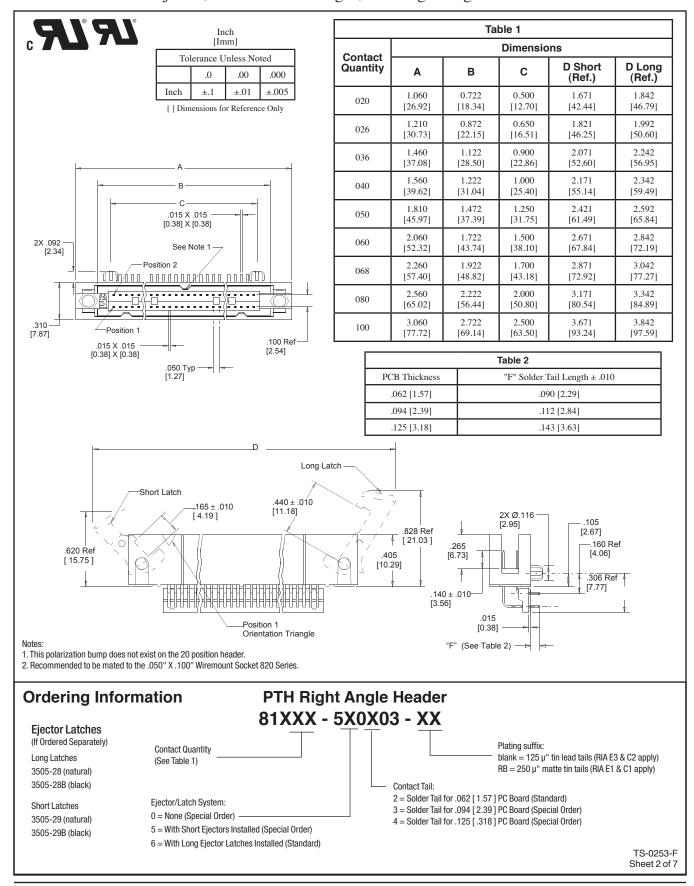


810 Series

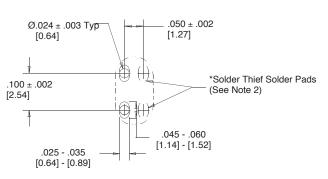

| Table 3 | | |
|-----------------|-----------------|--|
| Ejector Latches | Dimension E Min | |
| None | .575 [14.61] | |
| Long | 1.010 [25.65] | |
| Short | .885 [22.48] | |

*Solder Thief Solder Pads required only on Solder side of PC Board.

View A

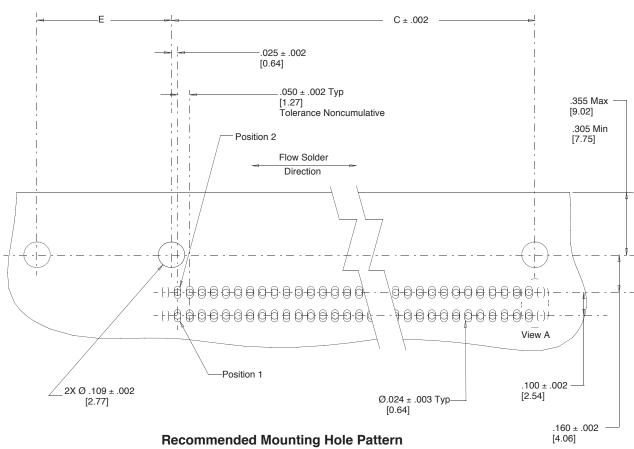

ecommended Mounting Hole Pattern PTH Right Angle Header

(shown for mounting side of PC Baord)

Notes

- 1. Recommended to process PC Boards through the solder bath such that the connector enters end first (two solder tails at a time). This will help prevent solder bridging.
- 2. A Dummy or Solder Thief Solder Pad at the end of each row is recommended on the bottom or solder side of the PC Board in order to help prevent solder bridging on the end solder tails. The solder thiefs are only required on the end of the rows which leave the solder bath last.
- 3. In order to facilitate soldering it is recommended that ejector latches be installed after the soldering process.


TS-0253-F Sheet 3 of 7

810 Series


.050" × .100" Latch/Ejector, PTH & SMT Straight, PTH Right Angle


| Table 1 | | | | | |
|----------|---------------|---------------|----------------|---------------|---------------|
| Contact | Dimensions | | | | |
| Quantity | Α | В | C Short (Ref.) | C Long (Ref.) | D |
| 020 | 1.060 [26.92] | 0.722 [18.34] | 1.671 [42.44] | 1.842 [46.79] | 0.860 [21.84] |
| 026 | 1.210 [30.73] | 0.872 [22.15] | 1.821 [46.25] | 1.992 [50.60] | 1.010 [25.65] |
| 036 | 1.460 [37.08] | 1.122 [28.50] | 2.071 [52.60] | 2.242 [56.95] | 1.260 [32.00] |
| 040 | 1.560 [39.62] | 1.222 [31.04] | 2.171 [55.14] | 2.342 [59.49] | 1.360 [34.54] |
| 050 | 1.810 [45.97] | 1.472 [37.39] | 2.421 [61.49] | 2.592 [65.84] | 1.610 [40.89] |
| 060 | 2.060 [52.32] | 1.722 [43.74] | 2.671 [67.84] | 2.842 [72.19] | 1.860 [47.24] |
| 068 | 2.260 [57.40] | 1.922 [48.82] | 2.871 [72.92] | 3.042 [77.27] | 2.060 [52.32] |
| 080 | 2.560 [65.02] | 2.222 [56.44] | 3.171 [80.54] | 3.342 [84.89] | 2.360 [59.94] |
| 100 | 3.060 [77.72] | 2.722 [69.14] | 3.671 [93.24] | 3.842 [97.59] | 2.860 [72.64] |



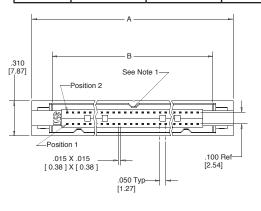

| Table 5 | | |
|---------------|-------------------------------|--|
| PCB Thickness | "F" Solder Tail Length ± .010 | |
| .062 [1.57] | .092 [2.34] | |
| .094 [2.39] | .110 [2.79] | |

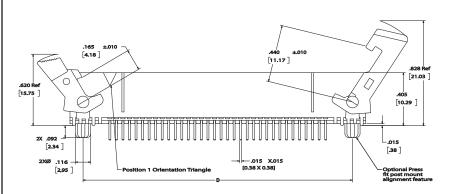




Notes:

- This polarization bump does not exist on the 20 position header.
- 2. Recommended to be mated to the .050" x .100" 820 Series Socket.


Ordering Information PTH Straight Header 81XXX - 6X0X0X - XX **Ejector Latches** Plating suffix: (If Ordered Separately) Contact Quantity blank = 125 μ " tin lead tails (RIA E3 & C2 apply) (See Table 4) Long Latches $RB=250\,\mu^{\text{\tiny H}}$ matte tin tails (RIA E1 & C1 apply) 3505-28 (natural) **Board Mounting Options:** 3505-28B (black) 1 = None (Special Order) 3 = Press fit posts both ends (Standard) Ejector/Latch System: **Short Latches** 0 = None (Special Order) 3505-29 (natural) Contact Tail: 5 = With Short Ejectors Installed (Special Order) 2 = Solder Tail for .062 [1.57] PC Board (Standard) 3505-29B (black) 6 = With Long Ejector Latches Installed (Standard) 3 = Solder Tail for .094 [2.39] PC Board (Special Order) TS-0253-F 4 = Solder Tail for .125 [.318] PC Board (Special Order) Sheet 4 of 7

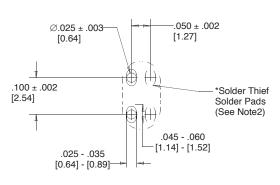

| Table 6 | | | |
|-----------------|-------------------|--|--|
| Ejector/Latches | Dimension E (Min) | | |
| None | .215 [5.46] | | |
| Long | .650 [16.51] | | |
| Short | .525 [13.34] | | |

*Solder Thief Solder Pads required only on Solder side of PC Board.

View A

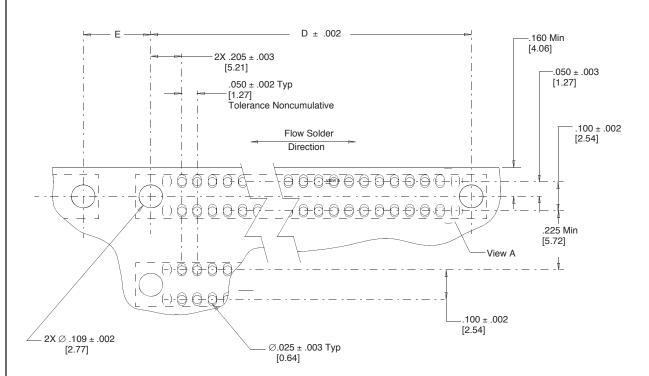

Recommended Mounting Hole Pattern PTH Vertical Header

(shown for mounting side of PC Board)


| Inch [Imm] | | | | |
|-----------------------------------|-----|------|-------|--|
| Tolerance Unless Noted | | | ted | |
| | .0 | .00 | .000 | |
| Inch | ±.1 | ±.01 | ±.005 | |
| [] Dimensions for Reference Only | | | | |

Note:


- Recommended to process PC Boards through the solder bath such that the connector enters end first (two solder tails at a time). This will help prevent solder bridging.
- 2. A Solder Thief Solder Pad (Dummy Pad) at the end of each row is recommended on the bottom or solder side of the PC Board in order to help prevent solder bridging on the end solder tails. The Solder Thiefs are only required on the end of the rows which leave the solder bath last.

TS-0253-F Sheet 5 of 7

810 Series

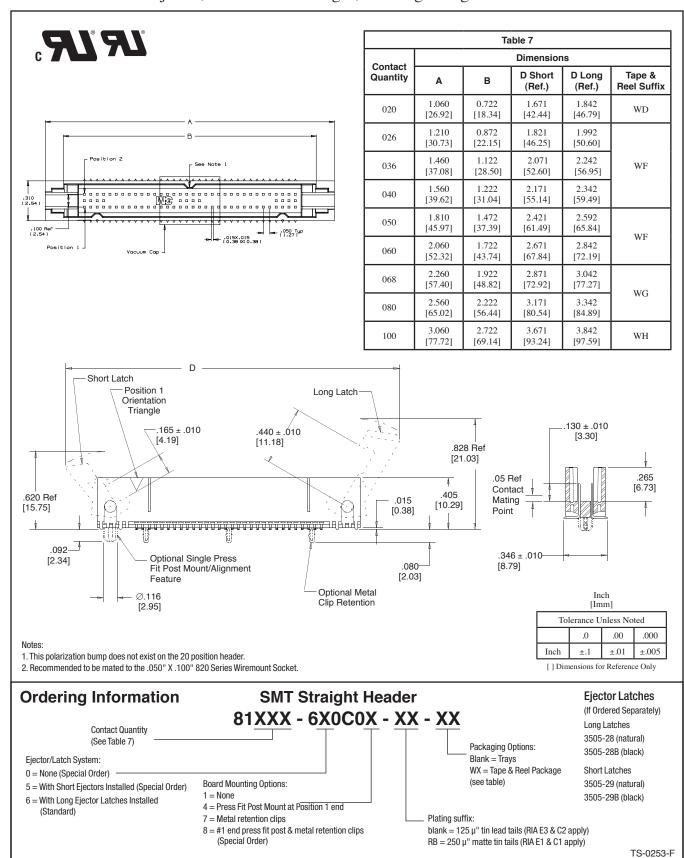


Sheet 6 of 7

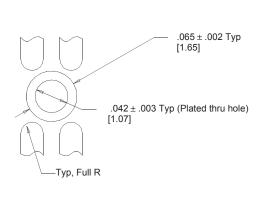

| <u>Detail A</u> | | |
|--|--|--|
| Optional plated thru hole for metal clip retention | | |

| Figetow Latabas | Dimensions | |
|-----------------|---------------|--|
| Ejector Latches | H Min | |
| None | .775 [19.69] | |
| Long | 1.085 [27.56] | |
| Short | 1.21 [30.73] | |

| No. of Positions | Dimensions | | |
|------------------|---------------|-------------|--|
| | F | G | |
| 20 | .450 [11.43] | N/A | |
| 26 | .600 [15.24] | .025 [0.64] | |
| 36 | .850 [21.59] | N/A | |
| 40 | .950 [24.13] | N/A | |
| 50 | 1.200 [30.48] | .025 [.64] | |
| 60 | 1.450 [36.83] | 0.000 | |
| 68 | 1.650 [41.91] | 0.000 | |
| 80 | 1.950 [49.53] | 0.000 | |
| 100 | 2.450 [62.23] | 0.000 | |

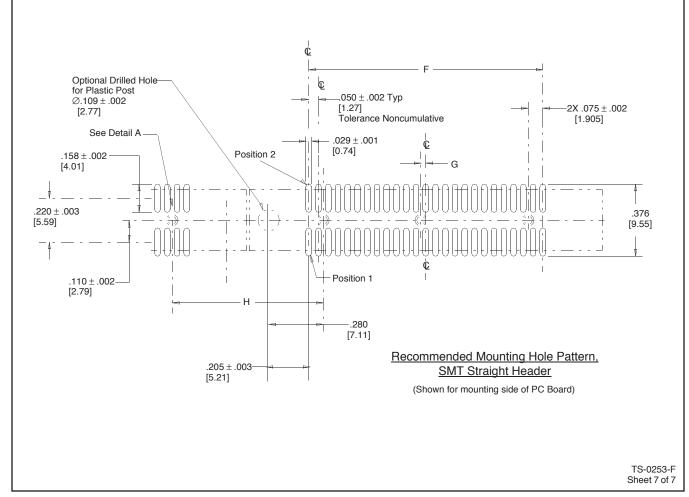

Important Notice All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M. Warranty; Limited Remedy; Limited Liability. This product will be free from defects in material and manufacture for a period of ninety (90) days from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the

warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of

the legal theory asserted.

6801 River Place Blvd. Austin, TX 78726-9000

www.3Mconnector.com

U.S.A. 1-800-225-5373

3M Electronics Solutions Division