# SN54F258, SN74F258 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS

SDFS067A - D2932, MARCH 1987 - REVISED OCTOBER 1993

- 3-State Outputs Interface Directly With System Bus
- Provides Bus Interface From Multiple Sources in High-Performance Systems
- Package Options Include Plastic Small-Outline Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs

### description


The 'F258 is designed to multiplex signals from 4-bit data sources to 4-output data lines in bus-organized systems. The 3-state outputs will not load the data lines when the output-enable  $(\overline{OE})$  input is at a high logic level.

The SN54F258 is characterized for operation over the full military temperature range of -55°C to 125°C. The SN74F258 is characterized for operation from 0°C to 70°C.


#### **FUNCTION TABLE**

	OUTPUT			
ŌĒ	A/B	Α	В	Υ
Н	Х	Χ	Х	Z
L	L	L	X	Н
L	L	Н	Χ	L
L	Н	Χ	L	Н
L	Н	Χ	Н	L

### SN54F258 . . . J PACKAGE SN74F258 . . . D OR N PACKAGE (TOP VIEW)




# SN54F258 . . . FK PACKAGE (TOP VIEW)



NC - No internal connection


### logic symbol†



<sup>&</sup>lt;sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the D, J, and N packages.



### logic diagram (positive logic)

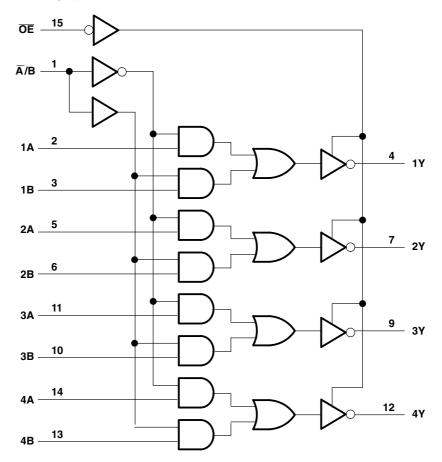

Pin numbers shown are for the D, J, and N packages.

# absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>	
Input current range	
Voltage range applied to any output in the disabled or power-off state	
Voltage range applied to any output in the high state	0.5 V to V <sub>CC</sub>
Current into any output in the low state: SN54F258	40 mA
	48 mA
Operating free-air temperature range: SN54F258	–55°C to 125°C
SN74F258	0°C to 70°C
Storage temperature range	–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input voltage ratings may be exceeded provided the input current ratings are observed.



# SN54F258, SN74F258 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS

SDFS067A - D2932, MARCH 1987 - REVISED OCTOBER 1993

### recommended operating conditions

		SN54F258			SN74F258			LINUT
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
$V_{IH}$	High-level input voltage	2			2			V
$V_{IL}$	Low-level input voltage			8.0			8.0	V
I <sub>IK</sub>	Input clamp current			-18			-18	mA
I <sub>OH</sub>	High-level output current			-3			-3	mA
I <sub>OL</sub>	Low-level output current			20			24	mA
T <sub>A</sub>	Operating free-air temperature	-55		125	0		70	°C

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

24244555	TEGT CONDITIONS		S	SN54F258			SN74F258			
PARAMETER	IES	TEST CONDITIONS			MAX	MIN	TYP <sup>†</sup>	MAX	UNIT	
$V_{IK}$	$V_{CC} = 4.5 \text{ V},$	$I_{l} = -18 \text{ mA}$			-1.2			-1.2	V	
	V 45V	I <sub>OH</sub> = - 1 mA	2.5	3.4		2.5	3.4			
$V_{OH}$	$V_{CC} = 4.5 \text{ V}$	$I_{OH} = -3 \text{ mA}$	2.4	3.3		2.4	3.3		V	
	$V_{CC} = 4.75 \text{ V},$	$I_{OH} = -1 \text{ mA to } -3 \text{ mA}$				2.7				
.,	V <sub>CC</sub> = 4.5 V	I <sub>OL</sub> = 20 mA		0.3	0.5				٧	
$V_{OL}$		I <sub>OL</sub> = 24 mA					0.35	0.5		
I <sub>OZH</sub>	$V_{CC} = 5.5 V$ ,	$V_0 = 2.7 \text{ V}$			50			50	μΑ	
I <sub>OZL</sub>	$V_{CC} = 5.5 V$ ,	V <sub>O</sub> = 0.5 V			-50			-50	μΑ	
I <sub>I</sub>	$V_{CC} = 5.5 \text{ V},$	V <sub>I</sub> = 7 V			0.1			0.1	mA	
I <sub>IH</sub>	$V_{CC} = 5.5 \text{ V},$	V <sub>I</sub> = 2.7 V			20			20	μΑ	
I <sub>IL</sub>	$V_{CC} = 5.5 \text{ V},$	V <sub>I</sub> = 0.5 V			- 0.6			- 0.6	mA	
I <sub>OS</sub> ‡	$V_{CC} = 5.5 \text{ V},$	V <sub>O</sub> = 0	-60		-150	-60		-150	mA	
I <sub>CCH</sub>		Condition A		6.2	9.5		6.2	9.5		
I <sub>CCL</sub>	V <sub>CC</sub> = 5.5 V, See Note 2	Condition B		15.1	23		15.1	23	mA	
I <sub>CCZ</sub>	Jee Note 2	Condition C		11.3	17		11.3	17		

<sup>&</sup>lt;sup>†</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

NOTE 2: I<sub>CC</sub> is measured with the outputs open under the following conditions:

- A. All B inputs at 4.5 V, other inputs grounded
- B. A/B and all B inputs at 4.5 V, other inputs grounded
- C.  $\overline{\text{OE}}$  and all B inputs at 4.5 V, other inputs grounded

<sup>&</sup>lt;sup>‡</sup> Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

# SN54F258, SN74F258 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS

SDFS067A - D2932, MARCH 1987 - REVISED OCTOBER 1993

### switching characteristics (see Note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)		$V_{CC}$ = 5 V, $C_L$ = 50 pF, R1 = 500 Ω, R2 = 500 Ω, $T_A$ = 25°C			$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$ $C_L = 50 \text{ pF},$ $R1 = 500  \Omega,$ $R2 = 500  \Omega,$ $T_A = \text{MIN to MAX}^\dagger$								
			′F258		SN54F258		SN74F258								
			MIN	TYP	MAX	MIN	MAX	MIN	MAX						
t <sub>PLH</sub>	Data	,	1	3.6	5.3	1	7.5	1	6						
t <sub>PHL</sub>	(A or B)	Any Y	1	3.1	4.7	1	6	1	5.5	ns					
t <sub>PLH</sub>	T/D	Amus V	3.2	6.1	8.5	3.2	12	3.2	9.5						
t <sub>PHL</sub>	Ā/B	Any Y	3.2	6.9	9.5	3.2	11.5	3.2	11	ns					
t <sub>PZH</sub>	G	A V	2.2	5.5	7.5	2.2	11	2.2	8.5						
t <sub>PZL</sub>	G	Any Y	Any Y	Any Y	Any Y	Any Y	Any Y	2.2	5.1	7.5	2.2	9.5	2.2	8.5	ns
t <sub>PHZ</sub>	G	Any Y	1.2	3.9	6	1	7	1.2	7						
t <sub>PLZ</sub>	5		Any Y	1.2	4.1	6	1.2	9	1.2	7	ns				


<sup>&</sup>lt;sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions. NOTE 3: Load circuits and waveforms are shown in Section 1.




# PACKAGE MATERIALS INFORMATION

www.ti.com 29-Jul-2009


### TAPE AND REEL INFORMATION

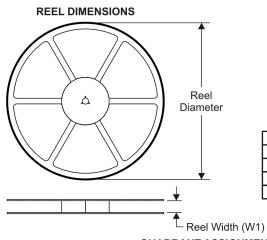



Α0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

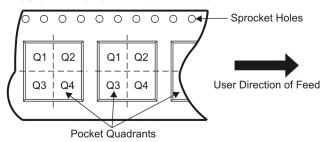

### \*All dimensions are nominal

Device	Package Type	Package Drawing			Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74F258DR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 29-Jul-2009



### \*All dimensions are nominal

Devi	е	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74F2	58DR	SOIC	D	16	2500	333.2	345.9	28.6

#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications
DSP	<u>dsp.ti.com</u>	Computers and Peripherals	www.ti.com/computers
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps
Interface	interface.ti.com	Energy	www.ti.com/energy
Logic	logic.ti.com	Industrial	www.ti.com/industrial
Power Mgmt	power.ti.com	Medical	www.ti.com/medical
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless-apps