## SN54AHC158, SN74AHC158 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS

SCLS346G - MAY 1996 - REVISED JULY 2003


- Operating Range 2-V to 5.5-V V<sub>CC</sub>
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

#### description/ordering information


These quadruple 2-line to 1-line data selectors/multiplexers are designed for 2-V to  $5.5\text{-V}\ \text{V}_{CC}$  operation.

The 'AHC158 devices feature a common strobe  $(\overline{G})$  input. When the strobe is high, all outputs are high. When the strobe is low, a 4-bit word is selected from one of two sources and is routed to the four outputs. These devices provide inverted data.

#### SN54AHC158 . . . J OR W PACKAGE SN74AHC158 . . . D, DB, DGV, N, NS, OR PW PACKAGE (TOP VIEW)



## SN54AHC158 . . . FK PACKAGE (TOP VIEW)



NC - No internal connection

#### **ORDERING INFORMATION**

TA	PACKAGET		ORDERABLE PART NUMBER	TOP-SIDE MARKING	
	PDIP – N	Tube	SN74AHC158N	SN74AHC158N	
-40°C to 85°C	SOIC - D	Tube	SN74AHC158D	AHC158	
	3010 - 15	Tape and reel	SN74AHC158DR	A110130	
	SOP – NS	Tape and reel	SN74AHC158NSR	AHC158	
40 0 10 03 0	SSOP – DB	Tape and reel	SN74AHC158DBR	HA158	
	TSSOP – PW	Tube	SN74AHC158PW	HA158	
	1330F = FW	Tape and reel	SN74AHC158PWR	TIATO	
	TVSOP – DGV	Tape and reel	SN74AHC158DGVR	HA158	
	CDIP – J	Tube	SNJ54AHC158J	SNJ54AHC158J	
–55°C to 125°C	CFP – W	Tube	SNJ54AHC158W	SNJ54AHC158W	
	LCCC – FK	Tube	SNJ54AHC158FK	SNJ54AHC158FK	

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



## FUNCTION TABLE (each data selector/multiplexer)

	INPL	OUTPUT		
G	A/B	Α	В	Y
Н	Х	Χ	Х	Н
L	L	L	X	Н
L	L	Н	X	L
L	Н	Χ	L	Н
L	Н	Χ	Н	L

## logic diagram (positive logic)

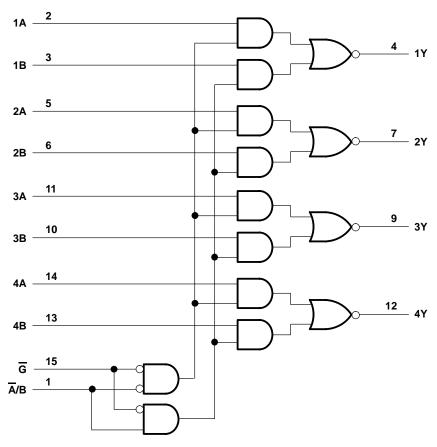

Pin numbers shown are for the D, DB, DGV, J, N, NS, PW, and W packages.

# SN54AHC158, SN74AHC158 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS

SCLS346G - MAY 1996 - REVISED JULY 2003

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>		–0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1)		–0.5 V to 7 V
Output voltage range, VO (see Note 1)		. $-0.5 \text{ V to V}_{CC} + 0.5 \text{ V}$
Input clamp current, $I_{IK}$ ( $V_I < 0$ )		
Output clamp current, IOK (VO < 0 or VO > VCC	;)	±20 mA
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )		±25 mA
Continuous current through V <sub>CC</sub> or GND		±50 mA
Package thermal impedance, $\theta_{JA}$ (see Note 2):	D package	73°C/W
	DB package	82°C/W
	DGV package	120°C/W
	N package	67°C/W
	NS package	64°C/W
	PW package	108°C/W
Storage temperature range, T <sub>stg</sub>		–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. The package thermal impedance is calculated in accordance with JESD 51-7.

#### recommended operating conditions (see Note 3)

·			SN54A	HC158	SN74A	HC158	UNIT	
			MIN	MAX	MIN	MAX	I	
Vcc	Supply voltage		2	5.5	2	5.5	V	
		V <sub>CC</sub> = 2 V	1.5		1.5			
$V_{IH}$	High-level input voltage	V <sub>CC</sub> = 3 V	2.1		2.1		V	
		V <sub>CC</sub> = 5.5 V	3.85		3.85			
		V <sub>CC</sub> = 2 V		0.5		0.5		
$V_{IL}$	Low-level input voltage	V <sub>CC</sub> = 3 V		0.9		0.9	V	
		V <sub>CC</sub> = 5.5 V		1.65				
٧ <sub>I</sub>	Input voltage		0	5.5	0	5.5	V	
٧o	Output voltage		0,4	Vcc	0	Vcc	V	
		V <sub>CC</sub> = 2 V	Ź	-50		-50	μΑ	
loh	High-level output current	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$	200	-4		-4	mA	
		$V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$	P	-8		-8		
		V <sub>CC</sub> = 2 V		50		50	μΑ	
$I_{OL}$	Low-level output current	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		4 8		4	mA	
		$V_{CC} = 5 V \pm 0.5 V$				8	IIIA	
Δt/Δν	langet transition rise or fall rate	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		100		100	no/\/	
ΔυΔν	Input transition rise or fall rate	$V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$		20		20	ns/V	
TA	Operating free-air temperature		-55	125	-40	85	°C	

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

### SN54AHC158, SN74AHC158 QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS

SCLS346G - MAY 1996 - REVISED JULY 2003

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	DAMETED	TEST CONDITIONS	V	T,	\ = 25°C	;	SN54AI	HC158	SN74AHC158		UNIT	
l PA	RAMETER	TEST CONDITIONS	VCC	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNII	
			2 V	1.9	2		1.9		1.9			
		I <sub>OH</sub> = -50 μA	3 V	2.9	3		2.9		2.9			
VOH			4.5 V	4.4	4.5		4.4		4.4		V	
		$I_{OH} = -4 \text{ mA}$	3 V	2.58			2.48	3	2.48			
		I <sub>OH</sub> = -8 mA	4.5 V	3.94			3.8	N.	3.8			
			2 V			0.1	(	0.1		0.1		
		I <sub>OL</sub> = 50 μA	3 V			0.1	40	0.1		0.1		
VOL			4.5 V			0.1	20	0.1		0.1	V	
		I <sub>OL</sub> = 4 mA	3 V			0.36	PAG	0.5		0.44		
		I <sub>OL</sub> = 8 mA				0.36		0.5		0.44		
lı	A or B inputs	V <sub>I</sub> = 5.5 V or GND	0 V to 5.5 V			±0.1		±1*		±1	μΑ	
ICC	_	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			4		40		40	μА	
Ci		V <sub>I</sub> = V <sub>CC</sub> or GND	5 V		2	10				10	pF	

 $<sup>^{*}</sup>$  On products compliant to MIL-PRF-38535, this parameter is not production tested at  $V_{CC} = 0 \text{ V}$ .

## switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD	T,	A = 25°	С	SN54A	HC158	SN74A	HC158	UNIT				
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT				
t <sub>PLH</sub>	A or B	Y	0 45 " 5		6.2**	9.7**	1**	11.5**	1	11.5	ns				
t <sub>PHL</sub>	AOIB		C <sub>L</sub> = 15 pF		6.2**	9.7**	1**	11.5**	1	11.5	115				
<sup>t</sup> PLH	Ā/B	Y	C: - 15 pE		8.4**	13.2**	1**	15.5**	1	15.5	ns				
<sup>t</sup> PHL	A/B	1	ī	ī	ī	ī	C <sub>L</sub> = 15 pF		8.4**	13.2**	1**	15.5**	1	15.5	115
t <sub>PLH</sub>	IG	Y	C <sub>I</sub> = 15 pF		8.7**	13.6**	1**	16**	1	16	ns				
<sup>t</sup> PHL	g	'	OL = 13 pi		8.7**	13.6**	1**	16**	1	16					
t <sub>PLH</sub>	A or B	Y	0 50 5		8.7	13.2	1 ,	15	1	15	ns				
t <sub>PHL</sub>	AUB	ī	C <sub>L</sub> = 50 pF		8.7	13.2	150	15	1	15	115				
t <sub>PLH</sub>	Ā/B	Y	C <sub>I</sub> = 50 pF		10.9	16.7	9	19	1	19	ns				
t <sub>PHL</sub>	A/B		CL = 30 pr		10.9	16.7	Q 1	19	1	19	115				
<sup>t</sup> PLH	IG	Y	C <sub>I</sub> = 50 pF		11.2	17.1	1	19.5	1	19.5	20				
t <sub>PHL</sub>	G	ſ	CL = 50 pr		11.2	17.1	1	19.5	1	19.5	ns				

<sup>\*\*</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

SCLS346G - MAY 1996 - REVISED JULY 2003

## switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD	T,	<b>Վ = 25°</b> C	;	SN54A	HC158	SN74AI	HC158	UNIT
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
t <sub>PLH</sub>	A or B	Y	C <sub>I</sub> = 15 pF		4.1*	6.4*	1*	7.5*	1	7.5	ns
<sup>t</sup> PHL	AOIB		C[ = 15 pr		4.1*	6.4*	1*	7.5*	1	7.5	115
t <sub>PLH</sub>	A/B	Y	C <sub>L</sub> = 15 pF		5.3*	8.1*	1*	9.5*	1	9.5	ns
t <sub>PHL</sub>	A/B	ī	CL = 15 pr		5.3*	8.1*	1*	9.5*	1	9.5	110
tPLH	ĪG	Y	C <sub>I</sub> = 15 pF		5.6*	8.6*	1*	10*	1	10	ns
<sup>t</sup> PHL	G	ľ	OL = 13 pi		5.6*	8.6*	1*	10*	1	10	113
t <sub>PLH</sub>	A or B	Υ	C: - 50 pF		5.6	8.4	1 .	9.5	1	9.5	no
t <sub>PHL</sub>	AUB	ī	C <sub>L</sub> = 50 pF		5.6	8.4	15)	9.5	1	9.5	ns
tPLH		Y	C 50 pF		6.8	10.1	9	11.5	1	11.5	20
tPLH	A/B	Y	C <sub>L</sub> = 50 pF		6.8	10.1	Q 1	11.5	1	11.5	ns
t <sub>PLH</sub>	G	Y	C. = 50 pE		7.1	10.6	1	12	1	12	ns
t <sub>PHL</sub>	G Y		$C_L = 50 \text{ pF}$		7.1	10.6	1	12	1	12	115

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

### noise characteristics $V_{CC}$ = 5 V, $C_L$ = 50 pF, $T_A$ = 25°C (see Note 4)


	PARAMETER	SN	UNIT		
	PARAMETER	MIN	TYP	MAX	UNII
V <sub>OL(P)</sub>	Quiet output, maximum dynamic V <sub>OL</sub>			0.8	V
V <sub>OL(V)</sub>	Quiet output, minimum dynamic V <sub>OL</sub>			-0.8	V
V <sub>OH(V)</sub>	Quiet output, minimum dynamic V <sub>OH</sub>		4.8		V
VIH(D)	High-level dynamic input voltage	3.5			V
V <sub>IL(D)</sub>	Low-level dynamic input voltage			1.5	V

NOTE 4: Characteristics are for surface-mount packages only.

### operating characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

	PARAMETER	TEST C	ONDITIONS	TYP	UNIT
C <sub>pd</sub> Power	dissipation capacitance	No load,	f = 1 MHz	11	pF

#### PARAMETER MEASUREMENT INFORMATION

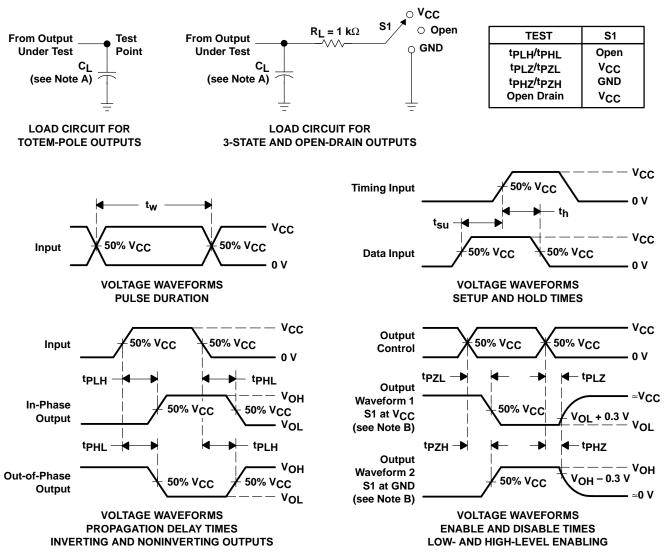

NOTES: A. C<sub>I</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz, Z<sub>O</sub> = 50  $\Omega$ , t<sub>f</sub>  $\leq$  3 ns, t<sub>f</sub>  $\leq$  3 ns.
- D. The outputs are measured one at a time with one input transition per measurement.
- E. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

	Applications	
amplifier.ti.com	Audio	www.ti.com/audio
dataconverter.ti.com	Automotive	www.ti.com/automotive
dsp.ti.com	Broadband	www.ti.com/broadband
interface.ti.com	Digital Control	www.ti.com/digitalcontrol
logic.ti.com	Military	www.ti.com/military
power.ti.com	Optical Networking	www.ti.com/opticalnetwork
microcontroller.ti.com	Security	www.ti.com/security
www.ti.com/lpw	Telephony	www.ti.com/telephony
	Video & Imaging	www.ti.com/video
	Wireless	www.ti.com/wireless
	dataconverter.ti.com dsp.ti.com interface.ti.com logic.ti.com power.ti.com microcontroller.ti.com	amplifier.ti.com dataconverter.ti.com dsp.ti.com dsp.ti.com interface.ti.com logic.ti.com power.ti.com microcontroller.ti.com www.ti.com/lpw  Audio Audio Audio Audio Automotive Broadband Digital Control Military Optical Networking Security Telephony Video & Imaging

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2007, Texas Instruments Incorporated



#### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
SN74AHC158D	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DBLE	OBSOLETE	SSOP	DB	16		TBD	Call TI	Call TI
SN74AHC158DBR	ACTIVE	SSOP	DB	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DBRE4	ACTIVE	SSOP	DB	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DBRG4	ACTIVE	SSOP	DB	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DE4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DG4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DGVR	ACTIVE	TVSOP	DGV	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DGVRE4	ACTIVE	TVSOP	DGV	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DGVRG4	ACTIVE	TVSOP	DGV	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DR	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DRE4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158DRG4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158N	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74AHC158NE4	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74AHC158NSR	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158NSRE4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158NSRG4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158PW	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158PWE4	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158PWG4	ACTIVE	TSSOP	PW	16	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158PWLE	OBSOLETE	TSSOP	PW	16		TBD	Call TI	Call TI
SN74AHC158PWR	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158PWRE4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74AHC158PWRG4	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM



#### PACKAGE OPTION ADDENDUM

18-Sep-2008

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in

a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.





19-Mar-2008


#### TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



\*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AHC158DBR	SSOP	DB	16	2000	330.0	16.4	8.2	6.6	2.5	12.0	16.0	Q1
SN74AHC158DGVR	TVSOP	DGV	16	2000	330.0	12.4	6.8	4.0	1.6	8.0	12.0	Q1
SN74AHC158DR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
SN74AHC158NSR	SO	NS	16	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
SN74AHC158PWR	TSSOP	PW	16	2000	330.0	12.4	7.0	5.6	1.6	8.0	12.0	Q1





\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AHC158DBR	SSOP	DB	16	2000	346.0	346.0	33.0
SN74AHC158DGVR	TVSOP	DGV	16	2000	346.0	346.0	29.0
SN74AHC158DR	SOIC	D	16	2500	333.2	345.9	28.6
SN74AHC158NSR	SO	NS	16	2000	346.0	346.0	33.0
SN74AHC158PWR	TSSOP	PW	16	2000	346.0	346.0	29.0

#### DB (R-PDSO-G\*\*)

#### PLASTIC SMALL-OUTLINE

#### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

#### PW (R-PDSO-G\*\*)

#### 14 PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

#### **MECHANICAL DATA**

### NS (R-PDSO-G\*\*)

## 14-PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



#### DGV (R-PDSO-G\*\*)

#### **24 PINS SHOWN**

#### **PLASTIC SMALL-OUTLINE**



NOTES: A. All linear dimensions are in millimeters.


B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.

D. Falls within JEDEC: 24/48 Pins – MO-153 14/16/20/56 Pins – MO-194

## D (R-PDS0-G16)

#### PLASTIC SMALL-OUTLINE PACKAGE

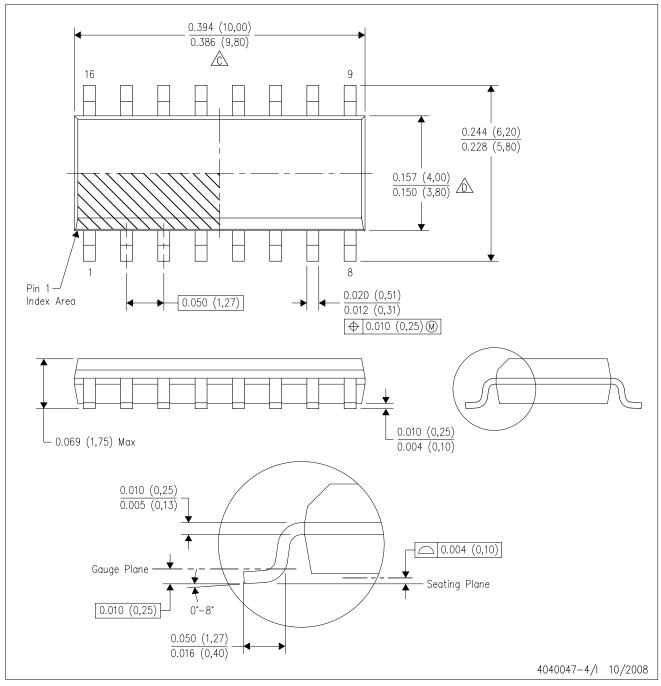

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
- Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
- E. Reference JEDEC MS-012 variation AC.



## N (R-PDIP-T\*\*)

### PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

#### **Products Amplifiers** amplifier.ti.com Data Converters dataconverter.ti.com DSP dsp.ti.com Clocks and Timers www.ti.com/clocks Interface interface.ti.com Logic logic.ti.com Power Mgmt power.ti.com Microcontrollers microcontroller.ti.com www.ti-rfid.com RF/IF and ZigBee® Solutions www.ti.com/lprf

Applications	
Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2008, Texas Instruments Incorporated