


#### www.ti.com

#### **FEATURES**

- Operates From 1.65 V to 3.6 V
- Inputs Accept Voltages to 5.5 V
- Max t<sub>pd</sub> of 5.5 ns at 3.3 V
- Output Ports Have Equivalent 26-Ω Series Resistors, So No External Resistors Are Required
- Typical V<sub>OLP</sub> (Output Ground Bounce)
  <0.8 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Typical V<sub>OHV</sub> (Output V<sub>OH</sub> Undershoot)
  >2 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Supports Mixed-Mode Signal Operation on All Ports (5-V Input/Output Voltage With 3.3-V V<sub>CC</sub>)
- I<sub>off</sub> Supports Partial-Power-Down Mode Operation
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

# DB, DBQ, DGV, DW, NS, OR PW PACKAGE (TOP VIEW)



### **DESCRIPTION/ORDERING INFORMATION**

This octal buffer/line driver is designed for 1.65-V to 3.6-V V<sub>CC</sub> operation.

The SN74LVC2244A is organized as two 4-bit line drivers with separate output-enable ( $\overline{OE}$ ) inputs. When  $\overline{OE}$  is low, the device passes data from the A inputs to the Y outputs. When  $\overline{OE}$  is high, the outputs are in the high-impedance state.

The outputs, which are designed to sink up to 12 mA, include equivalent 26- $\Omega$  resistors to reduce overshoot and undershoot.

### **ORDERING INFORMATION**

T <sub>A</sub>	PACKAG	E <sup>(1)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	SOIC - DW		SN74LVC2244ADW	LVC2244A
	301C - DVV	Reel of 2000	SN74LVC2244ADWR	LVC2244A
	SOP – NS SSOP – DB		SN74LVC2244ANSR	LVC2244A
			SN74LVC2244ADBR	LE244A
–40°C to 85°C	SSOP (QSOP) – DBQ	Reel of 2500	SN74LVC2244ADBQR	LVC2244A
		Tube of 70	SN74LVC2244APW	
	TSSOP - PW	Reel of 2000	SN74LVC2244APWR	LE244A
		Reel of 250	SN74LVC2244APWT	
	TVSOP - DGV	Reel of 2000	SN74LVC2244ADGVR	LE244A

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SCAS572K-APRIL 1996-REVISED MARCH 2005



# **DESCRIPTION/ORDERING INFORMATION (CONTINUED)**

Inputs can be driven from either 3.3-V or 5-V devices. This feature allows the use of this device as a translator in a mixed 3.3-V/5-V system environment.


This device is fully specified for partial-power-down applications using  $I_{\text{off}}$ . The  $I_{\text{off}}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.


To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

# FUNCTION TABLE (EACH BUFFER)

INP	JTS	OUTPUT
ŌĒ	Α	Y
L	Н	Н
L	L	L
Н	X	Z

#### **LOGIC DIAGRAM (POSITIVE LOGIC)**







# Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range		-0.5	6.5	V
VI	Input voltage range <sup>(2)</sup>		-0.5	6.5	V
Vo	Voltage range applied to any output in the h	nigh-impedance or power-off state <sup>(2)</sup>	-0.5	6.5	V
Vo	Voltage range applied to any output in the h	nigh or low state <sup>(2)(3)</sup>	-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>1</sub> < 0		-50	mA
l <sub>ok</sub>	Output clamp current	V <sub>O</sub> < 0		-50	mA
Io	Continuous output current			±50	mA
	Continuous current through V <sub>CC</sub> or GND			±100	mA
		DB package		70	
		DBQ package		68	
0	D1(1)	DGV package		92	0000
$\theta_{JA}$	Package thermal impedance (4)	DW package		58	°C/W
		NS package		60	
		PW package		83	
T <sub>stg</sub>	Storage temperature range		-65	150	°C

Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

# Recommended Operating Conditions<sup>(1)</sup>

			MIN	MAX	UNIT
	Complementage	Operating	1.65	3.6	V
$V_{CC}$	Supply voltage	Data retention only	1.5		V
		V <sub>CC</sub> = 1.65 V to 1.95 V	$0.65 \times V_{CC}$		
$V_{IH}$	High-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.7		V
		V <sub>CC</sub> = 2.7 V to 3.6 V	2		
		V <sub>CC</sub> = 1.65 V to 1.95 V		$0.35 \times V_{CC}$	
$V_{IL}$	Low-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		0.7	V
		V <sub>CC</sub> = 2.7 V to 3.6 V		0.8	
V <sub>I</sub>	Input voltage		0	5.5	V
M	Outrout valle ve	High or low state	0	V <sub>CC</sub>	V
Vo	Output voltage	3-state	0	5.5	V
		V <sub>CC</sub> = 1.65 V		-2	
	Himb lovel output ourrent	V <sub>CC</sub> = 2.3 V		-4	A
I <sub>OH</sub>	High-level output current	V <sub>CC</sub> = 2.7 V		-8	mA
		V <sub>CC</sub> = 3 V		-12	
		V <sub>CC</sub> = 1.65 V		2	
	Low lovel output ourrent	V <sub>CC</sub> = 2.3 V		4	A
l <sub>OL</sub>	Low-level output current	V <sub>CC</sub> = 2.7 V		8	mA
		V <sub>CC</sub> = 3 V		12	
Δt/Δν	Input transition rise or fall rate			10	ns/V
T <sub>A</sub>	Operating free-air temperature		-40	85	°C

All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed. The value of  $V_{CC}$  is provided in the recommended operating conditions table.

The package thermal impedance is calculated in accordance with JESD 51-7.



#### **Electrical Characteristics**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS		V <sub>cc</sub>	MIN	TYP <sup>(1)</sup> MAX	UNIT
	$I_{OH} = -100 \mu A$		1.65 V to 3.6 V	$V_{CC} - 0.2$		
	$I_{OH} = -2 \text{ mA}$		1.65 V	1.2		
	1 4	2.3 V	1.7			
$V_{OH}$	$I_{OH} = -4 \text{ mA}$		2.7 V	2.2		V
	I <sub>OH</sub> = -6 mA		3 V	2.4		
	$I_{OH} = -8 \text{ mA}$		2.7 V	2		
	I <sub>OH</sub> = -12 mA		3 V	2		
	I <sub>OL</sub> = 100 μA		1.65 V to 3.6 V		0.2	
	I <sub>OL</sub> = 2 mA		1.65 V		0.45	
	1 1	1 - 4 mA				
$V_{OL}$	I <sub>OL</sub> = 4 mA	2.7 V		0.4	V	
	I <sub>OL</sub> = 6 mA		3 V		0.55	
	I <sub>OL</sub> = 8 mA		2.7 V		0.6	
	I <sub>OL</sub> = 12 mA		3 V		0.8	
l <sub>l</sub>	V <sub>I</sub> = 0 to 5.5 V		3.6 V		±5	μΑ
I <sub>off</sub>	$V_I$ or $V_O = 5.5 \text{ V}$		0		±10	μΑ
I <sub>OZ</sub>	V <sub>O</sub> = 0 to 5.5 V		3.6 V		±10	μΑ
	$V_I = V_{CC}$ or GND	0	0.01/		10	^
I <sub>CC</sub>	$3.6 \text{ V} \le \text{V}_{\text{I}} \le 5.5 \text{ V}^{(2)}$	= 0	3.6 V		10	μΑ
$\Delta I_{CC}$	One input at $V_{CC}$ – 0.6 V, Other inputs at $V_{CC}$	or GND	2.7 V to 3.6 V		500	μΑ
C <sub>i</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND		3.3 V		4	pF
Co	$V_O = V_{CC}$ or GND		3.3 V		5.5	pF

All typical values are at  $V_{CC}$  = 3.3 V,  $T_{A}$  =  $25^{\circ}C.$  This applies in the disabled state only.

### **Switching Characteristics**

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = ± 0.1		V <sub>CC</sub> = 1 ± 0.2		V <sub>CC</sub> =	2.7 V	V <sub>CC</sub> = 3 ± 0.3	3.3 V 5 V	UNIT
	(INFOT)	(001F01)	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>pd</sub>	Α	Y	(1)	(1)	(1)	(1)		6.4	1.5	5.5	ns
t <sub>en</sub>	ŌĒ	Y	(1)	(1)	(1)	(1)		8.1	1	7.1	ns
t <sub>dis</sub>	ŌĒ	Y	(1)	(1)	(1)	(1)		7.3	1.5	6.8	ns

<sup>(1)</sup> This information was not available at the time of publication.

### **Operating Characteristics**


 $T_A = 25^{\circ}C$ 

	PARAMETER	TEST CONDITIONS	V <sub>CC</sub> = 1.8 V TYP	V <sub>CC</sub> = 2.5 V TYP	V <sub>CC</sub> = 3.3 V TYP	UNIT	
C	Power dissipation capacitance	Outputs enabled	f = 10 MHz	(1)	(1)	46	рF
Opd	per buffer/driver	Outputs disabled	I = IO WINZ	(1)	(1)	2	рг

<sup>(1)</sup> This information was not available at the time of publication.




#### PARAMETER MEASUREMENT INFORMATION



TEST	S1
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	V <sub>LOAD</sub>
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

V	INF	PUTS	.,	V	_		V
V <sub>CC</sub>	VI	t <sub>r</sub> /t <sub>f</sub>	V <sub>M</sub>	V <sub>LOAD</sub>	CL	R <sub>L</sub>	$oldsymbol{V}_{\Delta}$
1.8 V $\pm$ 0.15 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	<b>1 k</b> Ω	0.15 V
2.5 V $\pm$ 0.2 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	500 Ω	0.15 V
2.7 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V
3.3 V $\pm$ 0.3 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V

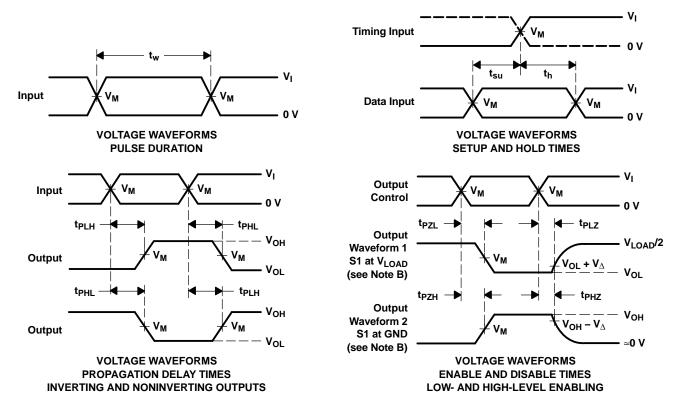

- NOTES: A. C<sub>I</sub> includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_0$  = 50  $\Omega$ .
  - D. The outputs are measured one at a time, with one transition per measurement.
  - E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
  - F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
  - G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
  - H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms





com 4-Jun-2007

# **PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	n MSL Peak Temp <sup>(3)</sup>
SN74LVC2244ADBLE	OBSOLETE	SSOP	DB	20		TBD	Call TI	Call TI
SN74LVC2244ADBQR	ACTIVE	SSOP/ QSOP	DBQ	20	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
SN74LVC2244ADBQRE4	ACTIVE	SSOP/ QSOP	DBQ	20	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
SN74LVC2244ADBQRG4	ACTIVE	SSOP/ QSOP	DBQ	20	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
SN74LVC2244ADBR	ACTIVE	SSOP	DB	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADBRG4	ACTIVE	SSOP	DB	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADGVR	ACTIVE	TVSOP	DGV	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADGVRE4	ACTIVE	TVSOP	DGV	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADGVRG4	ACTIVE	TVSOP	DGV	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADW	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADWE4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADWG4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADWR	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADWRE4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ADWRG4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ANSR	ACTIVE	SO	NS	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ANSRE4	ACTIVE	SO	NS	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244ANSRG4	ACTIVE	so	NS	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244APW	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244APWE4	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244APWG4	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244APWLE	OBSOLETE	TSSOP	PW	20		TBD	Call TI	Call TI
SN74LVC2244APWR	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244APWRE4	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244APWRG4	ACTIVE	TSSOP	PW	20	2000		CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244APWT	ACTIVE	TSSOP	PW	20	250	Green (RoHS &	CU NIPDAU	Level-1-260C-UNLIM



#### PACKAGE OPTION ADDENDUM

4-Jun-2007

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing		ckage Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
						no Sb/Br)		
SN74LVC2244APWTE4	ACTIVE	TSSOP	PW	20	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVC2244APWTG4	ACTIVE	TSSOP	PW	20	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 6-Aug-2010

# TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

# QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LVC2244ADBQR	SSOP/ QSOP	DBQ	20	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LVC2244ADBR	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
SN74LVC2244ADGVR	TVSOP	DGV	20	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LVC2244ADWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.0	2.7	12.0	24.0	Q1
SN74LVC2244ANSR	SO	NS	20	2000	330.0	24.4	8.2	13.0	2.5	12.0	24.0	Q1
SN74LVC2244APWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1
SN74LVC2244APWT	TSSOP	PW	20	250	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1

www.ti.com 6-Aug-2010



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LVC2244ADBQR	SSOP/QSOP	DBQ	20	2500	346.0	346.0	33.0
SN74LVC2244ADBR	SSOP	DB	20	2000	346.0	346.0	33.0
SN74LVC2244ADGVR	TVSOP	DGV	20	2000	346.0	346.0	29.0
SN74LVC2244ADWR	SOIC	DW	20	2000	346.0	346.0	41.0
SN74LVC2244ANSR	SO	NS	20	2000	346.0	346.0	41.0
SN74LVC2244APWR	TSSOP	PW	20	2000	346.0	346.0	33.0
SN74LVC2244APWT	TSSOP	PW	20	250	346.0	346.0	33.0

# DGV (R-PDSO-G\*\*)

#### **24 PINS SHOWN**

#### **PLASTIC SMALL-OUTLINE**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.

D. Falls within JEDEC: 24/48 Pins – MO-153 14/16/20/56 Pins – MO-194

# DW (R-PDSO-G20)


# PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AC.



# DW (R-PDSO-G20)

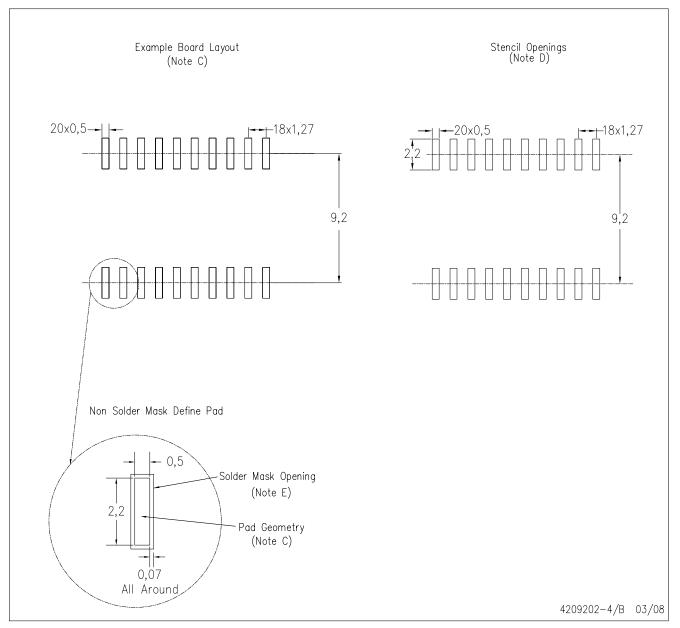

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC—7525
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



DBQ (R-PDSO-G20)

# PLASTIC SMALL-OUTLINE PACKAGE




- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15) per side.
- D. Falls within JEDEC MO-137 variation AD.



# DBQ (R-PDSO-G20)

# PLASTIC SMALL OUTLINE PACKAGE

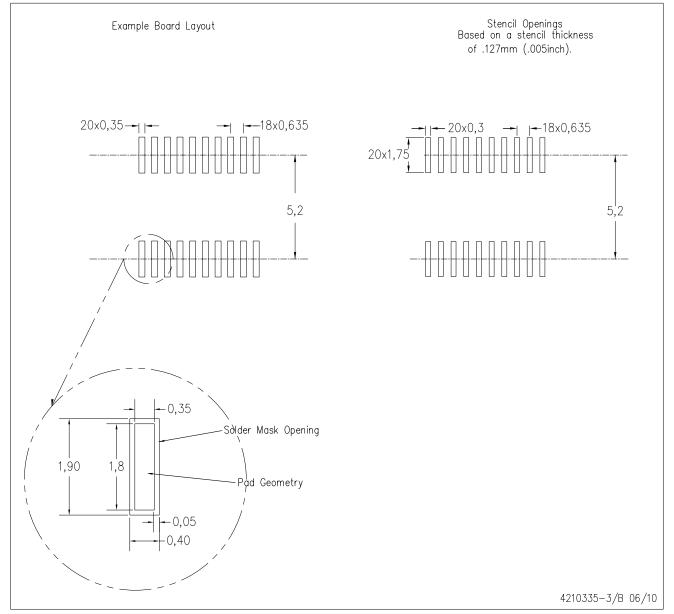

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
- D. Publication IPC-7351 is recommended for alternate designs.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.



# **MECHANICAL DATA**

# NS (R-PDSO-G\*\*)

# 14-PINS SHOWN

### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



# DB (R-PDSO-G\*\*)

# PLASTIC SMALL-OUTLINE

#### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

# PW (R-PDSO-G\*\*)

#### 14 PINS SHOWN

# PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications				
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio			
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive			
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications			
DSP	<u>dsp.ti.com</u>	Computers and Peripherals	www.ti.com/computers			
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps			
Interface	interface.ti.com	Energy	www.ti.com/energy			
Logic	logic.ti.com	Industrial	www.ti.com/industrial			
Power Mgmt	power.ti.com	Medical	www.ti.com/medical			
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security			
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense			
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video			
		Wireless	www.ti.com/wireless-apps			