


- 2-V to 5.5-V V<sub>CC</sub> Operation
- Unbuffered Outputs
- Max t<sub>pd</sub> of 6.5 ns at 5 V
- Typical V<sub>OLP</sub> (Output Ground Bounce)
   <0.8 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Typical V<sub>OHV</sub> (Output V<sub>OH</sub> Undershoot)
   >2.3 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Support Mixed-Mode Voltage Operation on All Ports
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)





SN74LVU04A . . . RGY PACKAGE



SN54LVU04A . . . FK PACKAGE

NC - No internal connection

### description/ordering information

These hex inverters are designed for 2-V to 5.5-V V<sub>CC</sub> operation.

The 'LVU04A devices contain six independent inverters with unbuffered outputs. These devices perform the Boolean function  $Y = \overline{A}$ .

#### ORDERING INFORMATION

TA	PACK	AGE <sup>†</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	QFN – RGY	Reel of 1000	SN74LVU04ARGYR	LVU04A
	0010 D	Tube of 50	SN74LVU04AD	11///1044
	SOIC - D	Reel of 2500	SN74LVU04ADR	LVU04A
	SOP - NS	Reel of 2000	SN74LVU04ANSR	LVU04A
-40°C to 85°C	SSOP – DB	Reel of 2000	SN74LVU04ADBR	LU04A
		Tube of 90	SN74LVU04APW	
	TSSOP - PW	Reel of 2000	SN74LVU04APWR	LU04A
		Reel of 250	SN74LVU04APWT	
	TVSOP - DGV	Reel of 2000	SN74LVU04ADGVR	LU04A
	CDIP – J	Tube of 25	SNJ54LVU04AJ	SNJ54LVU04AJ
–55°C to 125°C	CFP – W	Tube of 150	SNJ54LVU04AW	SNJ54LVU04AW
	LCCC – FK	Tube of 85	SNJ54LVU04AFK	SNJ54LVU04AFK

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



## FUNCTION TABLE (each inverter)

INPUT A	OUTPUT Y
Н	L
L	Н

### logic diagram, each inverter (positive logic)



### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage range, $V_{CC}$	–0.5 V to 7 V
Output voltage range, V <sub>O</sub> (see Notes 1 and 2)	
Input clamp current, $I_{ K }(V_{ I } < 0)$	–20 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0)	
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )	±25 mA
Continuous current through V <sub>CC</sub> or GND	±50 mA
Package thermal impedance, θ <sub>JA</sub> (see Note 3): D package	86°C/W
(see Note 3): DB package	96°C/W
(see Note 3): DGV package	127°C/W
(see Note 3): NS package	76°C/W
(see Note 3): PW package	113°C/W
(see Note 4): RGY package	47°C/W
Storage temperature range, T <sub>stg</sub>	

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
  - 2. This value is limited to 5.5 V maximum.
  - 3. The package thermal impedance is calculated in accordance with JESD 51-7.
  - 4. The package thermal impedance is calculated in accordance with JESD 51-5.



### recommended operating conditions (see Note 5)

			SN54L	VU04A	SN74L	VU04A	
			MIN	MAX	MIN	MAX	UNIT
VCC	Supply voltage		2	5.5	2	5.5	V
		V <sub>CC</sub> = 2 V	1.7		1.7		
.,	LPak Java Canada sakana	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	V <sub>CC</sub> × 0.8		$V_{CC} \times 0.8$		V
VIH	High-level input voltage	$V_{CC} = 3 \text{ V to } 3.6 \text{ V}$	$V_{CC} \times 0.8$		$V_{CC} \times 0.8$		V
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	$V_{CC} \times 0.8$		$V_{CC} \times 0.8$		
		V <sub>CC</sub> = 2 V		0.3		0.3	
.,	Law law Line of waltern	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		$V_{CC} \times 0.2$		$V_{CC} \times 0.2$	V
$V_{IL}$	Low-level input voltage	V <sub>CC</sub> = 3 V to 3.6 V		$V_{CC} \times 0.2$		$V_{CC} \times 0.2$	V
		V <sub>CC</sub> = 4.5 V to 5.5 V		$V_{CC} \times 0.2$		$V_{CC} \times 0.2$	
VI	Input voltage		0	5.5	0	5.5	V
VO	Output voltage		0	VCC	0	Vcc	V
		V <sub>CC</sub> = 2 V	1	-50		-50	μΑ
	LPak lavel sylvet symmet	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	20	-2		-2	
ЮН	High-level output current	V <sub>CC</sub> = 3 V to 3.6 V	20	-6		-6	mA
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	P	-12		-12	
		V <sub>CC</sub> = 2 V		50		50	μΑ
	Landard advisarious	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		2		2	
lOL	Low-level output current	V <sub>CC</sub> = 3 V to 3.6 V		6		6	mA
		V <sub>CC</sub> = 4.5 V to 5.5 V		12		12	
TA	Operating free-air temperature		-55	125	-40	85	°C

NOTE 5: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST CONDITIONS	.,	SN54	4LVU04A		SN74	LVU04A	١	
PARAMETER	TEST CONDITIONS	v <sub>CC</sub>	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
	I <sub>OH</sub> = -50 μA	2 V to 5.5 V	V <sub>CC</sub> -0.1			V <sub>CC</sub> -0.1			
V	$I_{OH} = -2 \text{ mA}$	2.3 V	2			2			V
VOH	I <sub>OH</sub> = -6 mA	3 V	2.48	, sh		2.48			V
	$I_{OH} = -12 \text{ mA}$	4.5 V	3.8	, Si		3.8			
	I <sub>OL</sub> = 50 μA	2 V to 5.5 V		D. C.	0.1			0.1	
V = :	$I_{OL} = 2 \text{ mA}$	2.3 V			0.4			0.4	.,
VOL	I <sub>OL</sub> = 6 mA	3 V	"//		0.44			0.44	V
	I <sub>OL</sub> = 12 mA	4.5 V	020		0.55			0.55	
lį	V <sub>I</sub> = 5.5 V or GND	0 V to 5.5 V	Q		±1			±1	μΑ
Icc	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			20			20	μΑ
C <sub>i</sub>	$V_I = V_{CC}$ or GND	3.3 V		4			4		pF

SCES130L - MARCH 1998 - REVISED DECEMBER 2004

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 2.5 V $\pm$ 0.2 V (unless otherwise noted) (see Figure 1)

242445	FROM	то	LOAD	T	ղ = 25°C	;	SN54LVU04A	SN74L	VU04A		Ì
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN MAX	MIN	MAX	UNIT	l
tool	۸	V	C <sub>L</sub> = 15 pF		3.2*	10.9*	1* 14*	1	14	20	
<sup>t</sup> pd	A	ſ	C <sub>L</sub> = 50 pF		6.6	13.4	1 16	1	16	ns	l

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

242445	FROM	то	LOAD	T,	ղ = 25°C	;	SN54LVU04A	SN74L	VU04A		
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN MA	MIN	MAX	UNIT	l
t	۸	V	C <sub>L</sub> = 15 pF		2.5*	8.9*	1* 10.5	* 1	10.5		1
<sup>t</sup> pd	A	r	C <sub>L</sub> = 50 pF		4.7	11.4	Q1 1	3 1	13	ns	

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

## switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

DADAMETER	FROM	то	TO LOAD		T <sub>A</sub> = 25°C		SN54LVU04A	SN74L	SN74LVU04A	
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN MA	MIN	MAX	UNIT
t <sub>o a</sub>	^	V	C <sub>L</sub> = 15 pF		2.2*	5.5*	1* 6.5	* 1	6.5	
<sup>t</sup> pd	A	r	C <sub>L</sub> = 50 pF		3.9	7	<b>Q1</b>	3 1	8	ns

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

### noise characteristics, $V_{CC} = 3.3 \text{ V}$ , $C_L = 50 \text{ pF}$ , $T_A = 25^{\circ}\text{C}$ (see Note 6)

	DADAMETED	SN7	SN74LVU04A			
	PARAMETER	MIN	TYP	MAX	UNIT	
V <sub>OL(P)</sub>	Quiet output, maximum dynamic V <sub>OL</sub>		0.5	8.0	V	
V <sub>OL</sub> (V)	Quiet output, minimum dynamic V <sub>OL</sub>		-0.1	-0.8	V	
VOH(V)	Quiet output, minimum dynamic VOH		3		V	
V <sub>IH(D)</sub>	High-level dynamic input voltage	2.31			V	
V <sub>IL(D)</sub>	Low-level dynamic input voltage			0.99	V	


NOTE 6: Characteristics are for surface-mount packages only.

### operating characteristics, T<sub>A</sub> = 25°C

PARAMETER			TEST CONDITIONS			UNIT
C., .1	Power dissipation capacitance	$C_1 = 50 pF$	f = 10 MHz	3.3 V	5.6	۶ <u>-</u>
Cpd	Fower dissipation capacitance	CL = 50 pr,	I = 10 WIHZ	5 V	6.7	pF



#### PARAMETER MEASUREMENT INFORMATION

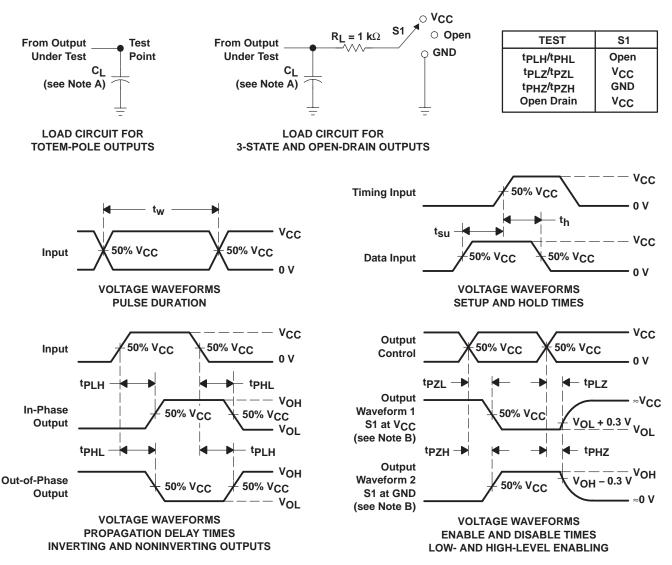

- NOTES: A.  $C_L$  includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O$  = 50  $\Omega$ ,  $t_f \leq$  3 ns.  $t_f \leq$  3 ns.
  - D. The outputs are measured one at a time, with one input transition per measurement.
  - E. tpLZ and tpHZ are the same as tdis.
  - F. tpzi and tpzH are the same as ten.
  - G. tpHL and tpLH are the same as tpd.
  - H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms





www.ti.com 8-Dec-2009

### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
SN74LVU04AD	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADBLE	OBSOLETE	SSOP	DB	14		TBD	Call TI	Call TI
SN74LVU04ADBR	ACTIVE	SSOP	DB	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADBRE4	ACTIVE	SSOP	DB	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADBRG4	ACTIVE	SSOP	DB	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADE4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADG4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADGVR	ACTIVE	TVSOP	DGV	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADGVRE4	ACTIVE	TVSOP	DGV	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADGVRG4	ACTIVE	TVSOP	DGV	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADR	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADRE4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ADRG4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ANSR	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ANSRE4	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04ANSRG4	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04APW	ACTIVE	TSSOP	PW	14	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04APWE4	ACTIVE	TSSOP	PW	14	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04APWG4	ACTIVE	TSSOP	PW	14	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04APWLE	OBSOLETE	TSSOP	PW	14		TBD	Call TI	Call TI
SN74LVU04APWR	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04APWRE4	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04APWRG4	ACTIVE	TSSOP	PW	14	2000	·	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04APWT	ACTIVE	TSSOP	PW	14	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04APWTE4	ACTIVE	TSSOP	PW	14	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LVU04APWTG4	ACTIVE	TSSOP	PW	14	250	Green (RoHS &	CU NIPDAU	Level-1-260C-UNLIM

#### PACKAGE OPTION ADDENDUM

www.ti.com 8-Dec-2009

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing		ckage Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
						no Sb/Br)		
SN74LVU04ARGYR	ACTIVE	VQFN	RGY	14 3	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
SN74LVU04ARGYRG4	ACTIVE	VQFN	RGY	14 3	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN74LVU04A:

Automotive: SN74LVU04A-Q1

NOTE: Qualified Version Definitions:


Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

### **PACKAGE MATERIALS INFORMATION**

www.ti.com 6-Aug-2010


### TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
	Dimension designed to accommodate the component length
	Dimension designed to accommodate the component thickness
	Overall width of the carrier tape
P1	Pitch between successive cavity centers


### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

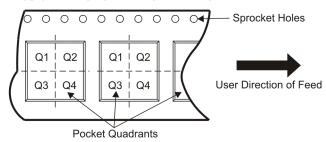

#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LVU04ADBR	SSOP	DB	14	2000	330.0	16.4	8.2	6.6	2.5	12.0	16.0	Q1
SN74LVU04ADGVR	TVSOP	DGV	14	2000	330.0	12.4	6.8	4.0	1.6	8.0	12.0	Q1
SN74LVU04ADR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LVU04ANSR	SO	NS	14	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
SN74LVU04APWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LVU04APWT	TSSOP	PW	14	250	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LVU04ARGYR	VQFN	RGY	14	3000	330.0	12.4	3.75	3.75	1.15	8.0	12.0	Q1

www.ti.com 6-Aug-2010

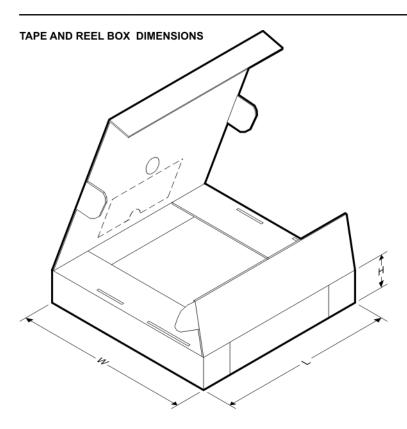

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LVU04ADBR	SSOP	DB	14	2000	346.0	346.0	33.0
SN74LVU04ADGVR	TVSOP	DGV	14	2000	346.0	346.0	29.0
SN74LVU04ADR	SOIC	D	14	2500	346.0	346.0	33.0
SN74LVU04ANSR	SO	NS	14	2000	346.0	346.0	33.0
SN74LVU04APWR	TSSOP	PW	14	2000	346.0	346.0	29.0
SN74LVU04APWT	TSSOP	PW	14	250	346.0	346.0	29.0
SN74LVU04ARGYR	VQFN	RGY	14	3000	346.0	346.0	29.0

### DGV (R-PDSO-G\*\*)

### **24 PINS SHOWN**

### **PLASTIC SMALL-OUTLINE**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.


C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.

D. Falls within JEDEC: 24/48 Pins – MO-153 14/16/20/56 Pins – MO-194



### D (R-PDSO-G14)

### PLASTIC SMALL-OUTLINE PACKAGE

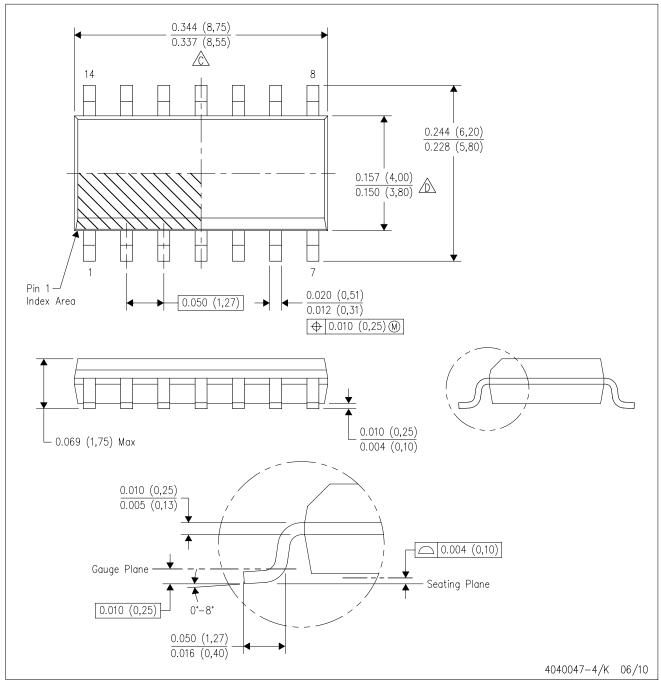


- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
- Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
- E. Reference JEDEC MS-012 variation AB.




## D (R-PDSO-G14)

### PLASTIC SMALL OUTLINE

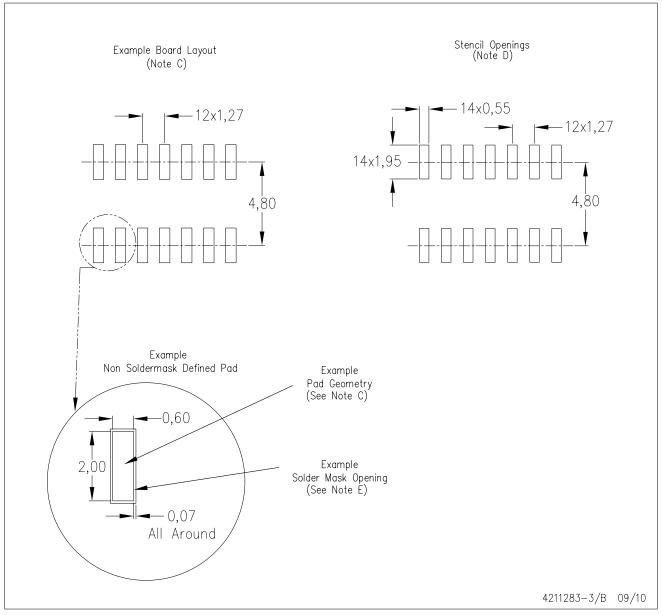

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



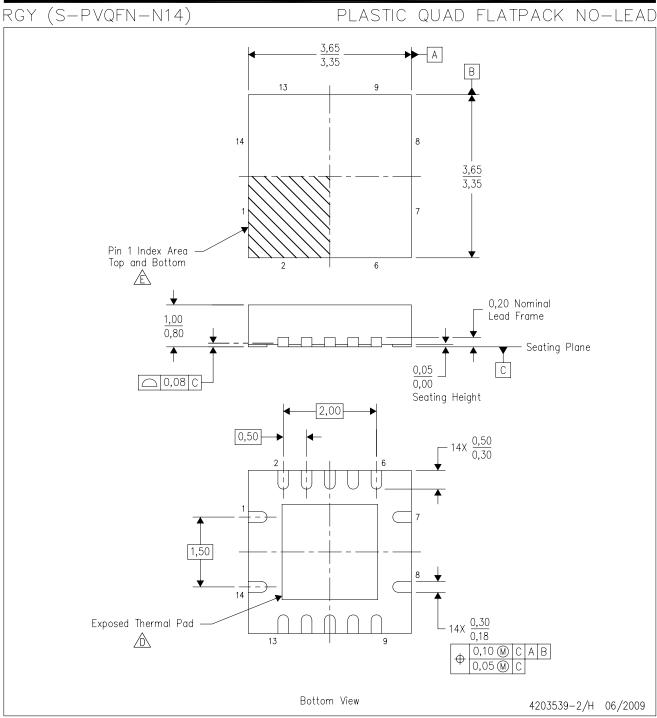

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. QFN (Quad Flatpack No-Lead) package configuration.
- The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
- Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated. The Pin 1 identifiers are either a molded, marked, or metal feature.
- F. Package complies to JEDEC MO-241 variation BA.




### THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No—Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

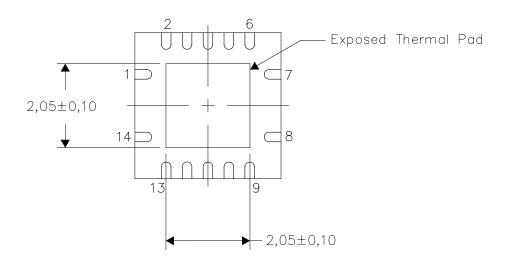


Bottom View

NOTES: All linear dimensions are in millimeters

Exposed Thermal Pad Dimensions

### RGY (S-PVQFN-N14)

### PLASTIC QUAD FLATPACK NO-LEAD

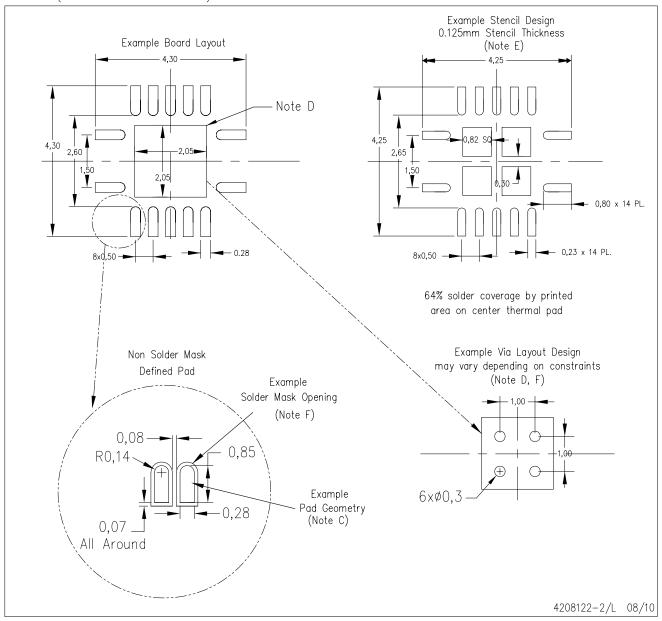

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat—Pack QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout.

  These documents are available at www.ti.com <a href="https://www.ti.com">http://www.ti.com</a>.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- F. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.



### **MECHANICAL DATA**

### NS (R-PDSO-G\*\*)

### 14-PINS SHOWN

### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



### DB (R-PDSO-G\*\*)

### PLASTIC SMALL-OUTLINE

### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

### PW (R-PDSO-G\*\*)

### 14 PINS SHOWN

### PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.


B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

## PW (R-PDSO-G14)

### PLASTIC SMALL OUTLINE

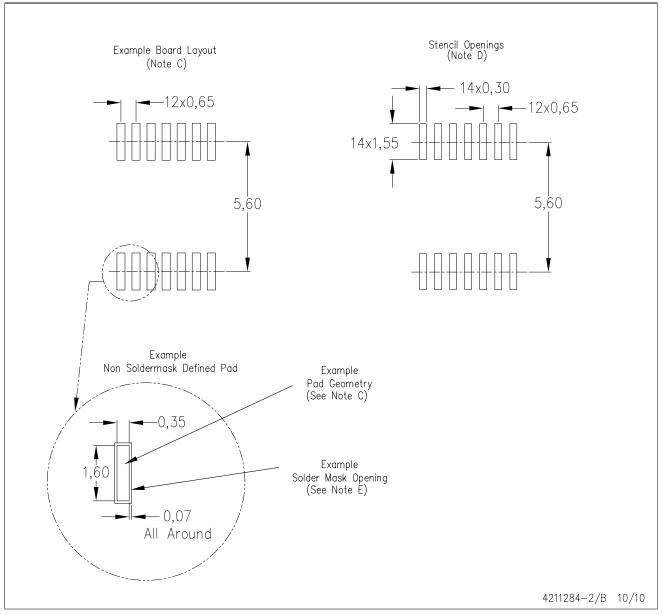

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications			
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio		
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive		
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications		
DSP	<u>dsp.ti.com</u>	Computers and Peripherals	www.ti.com/computers		
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps		
Interface	interface.ti.com	Energy	www.ti.com/energy		
Logic	logic.ti.com	Industrial	www.ti.com/industrial		
Power Mgmt	power.ti.com	Medical	www.ti.com/medical		
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security		
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense		
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video		
		Wireless	www.ti.com/wireless-apps		