- State-of-the-Art BiCMOS Design Significantly Reduces I<sub>CCZ</sub>
- ESD Protection Exceeds 2000 V Per MIL-STD-883C, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)
- Designed to Facilitate Incident-Wave Switching for Line Impedances of 25  $\Omega$  or Greater
- Distributed V<sub>CC</sub> and GND Pins Minimize Noise Generated by the Simultaneous Switching of Outputs
- Package Options Include Plastic Small-Outline (DW) Packages, Ceramic Chip Carriers (FK) and Flatpacks (W), and Standard Plastic and Ceramic 300-mil DIPs (JT, NT)

#### description


These  $25-\Omega$  octal buffers and line drivers are designed specifically to improve both the performance and density of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters.

These buffers are capable of sinking 188-mA  $I_{OL}$ , which facilitates switching 25- $\Omega$  transmission lines on the incident wave. The distributed  $V_{CC}$  and GND pins minimize switching noise for more reliable system operation.


When the output-enable (1 $\overline{OE}$  and 2 $\overline{OE}$ ) inputs are low, the device transmits data from the A inputs to the Y outputs. When 1 $\overline{OE}$  and 2 $\overline{OE}$  are high, the outputs are in the high-impedance state.

The SN54BCT25244 is characterized for operation over the full military temperature range of -55°C to 125°C. The SN74BCT25244 is characterized for operation from 0°C to 70°C.

#### SN54BCT25244 . . . JT OR W PACKAGE SN74BCT25244 . . . DW OR NT PACKAGE (TOP VIEW)



## SN54BCT25244 . . . FK PACKAGE (TOP VIEW)




NC - No internal connection

## FUNCTION TABLE (each buffer/driver)

INPU	JTS	ОИТРИТ
OE	Α	Y
L	Н	Н
L	L	L
Н	Χ	Z





#### logic symbol†



<sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

#### logic diagram (positive logic)

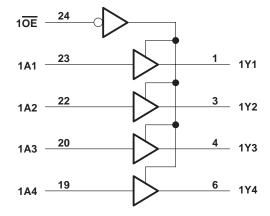

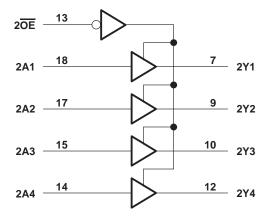

Pin numbers shown are for the DW, JT, NT, and W packages.

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

Supply voltage range, V <sub>CC</sub>	$\ldots$ $-0.5\ V$ to 7 $V$
Input voltage range, V <sub>I</sub> (see Note 1)	$\ldots$ $-0.5\ V$ to 7 $V$
Voltage range applied to any output in the disabled or power-off state, V <sub>O</sub>	$\dots$ –0.5 V to 5.5 V
Voltage range applied to any output in the high state, V <sub>O</sub>	$\dots$ -0.5 V to V <sub>CC</sub>
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> < 0)	30 mA
Current into any output in the low state, I <sub>O</sub> : SN54BCT25244	250 mA
SN74BCT25244	376 mA
Operating free-air temperature range: SN54BCT25244	$-55^{\circ}\text{C}$ to $125^{\circ}\text{C}$
SN74BCT25244	$\dots \dots 0^{\circ} C$ to $70^{\circ} C$
Storage temperature range	$-65^{\circ}$ C to $150^{\circ}$ C

<sup>‡</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

#### recommended operating conditions (see Note 2)

		SN5	4BCT25	244	SN7	4BCT25	244	UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
VIH	High-level input voltage	2			2			V
V <sub>IL</sub>	Low-level input voltage			0.8			0.8	V
lıK	Input clamp current			-18			-18	mA
ІОН	High-level output current			-53			-80	mA
loL	Low-level output current			125			188	mA
TA	Operating free-air temperature	-55		125	0		70	°C

NOTE 2: Unused or floating inputs must be held high or low.

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	PARAMETER TEST CONDITIONS			4BCT25	244	SN7	4BCT25	244	UNIT
PARAMETER				TYP <sup>†</sup>	MAX	MIN	TYP†	MAX	UNIT
VIK	$V_{CC} = 4.5 \text{ V},$	I <sub>I</sub> = -18 mA			-1.2			-1.2	V
	$V_{CC} = 4.75 \text{ V},$	$I_{OH} = -3 \text{ mA}$				2.7			
Vон	V <sub>CC</sub> = 4.5 V	$I_{OH} = -53 \text{ mA}$	2						V
	VCC = 4.5 V	$I_{OH} = -80 \text{ mA}$				2			
		I <sub>OL</sub> = 94 mA		0.38	0.55		0.42	0.55	
$V_{OL}$	V <sub>CC</sub> = 4.5 V	I <sub>OL</sub> = 125 mA			0.8				V
		I <sub>OL</sub> = 188 mA						0.7	
lį	V <sub>CC</sub> = 5.5 V,	$V_{CC} = 5.5 \text{ V},$ $V_{I} = 5.5 \text{ V}$			0.1			0.1	mA
lН	V <sub>CC</sub> = 5.5 V,	V <sub>I</sub> = 2.7 V			20			20	μΑ
I <sub>IL</sub>	$V_{CC} = 5.5 \text{ V},$	V <sub>I</sub> = 0.5 V			-0.6			-0.6	mA
I <sub>OZH</sub>	V <sub>CC</sub> = 5.5 V,	V <sub>O</sub> = 2.7 V			50			50	μΑ
lozL	V <sub>CC</sub> = 5.5 V,	V <sub>O</sub> = 0.5 V			-50			-50	μΑ
ICCL	V <sub>CC</sub> = 5.5 V,	Outputs open		90	119		90	119	mA
ІССН	V <sub>CC</sub> = 5.5 V,			59	78		59	78	mA
lccz	V <sub>CC</sub> = 5.5 V,			7	11		7	11	mA
C <sub>i</sub>	V <sub>CC</sub> = 5 V,			5.5			5.5		pF
Co	V <sub>CC</sub> = 5 V,	V <sub>O</sub> = 2.5 V or 0.5 V		17			17		pF

<sup>&</sup>lt;sup>†</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

# switching characteristics over recommended ranges of supply voltage and operating free-air temperature, $C_L$ = 50 pF (unless otherwise noted) (see Note 3)

	• •		, ,		•					
PARAMETER	FROM	TO (OUTPUT)	V <sub>(</sub>	CC = 5 V 4 = 25°C	/, }	SN54BC	Γ25244	SN74BC	Γ25244	UNIT
	(INPUT)		MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t <sub>PLH</sub>	_	V	1	3.2	4.9	1	5.6	1	5.5	no
t <sub>PHL</sub>	A	Ť	2	4	5.6	2	6.3	2	6	ns
<sup>t</sup> PZH	OF	V	3.2	5.6	8.5	3.2	9.7	3.2	9.3	no
t <sub>PZL</sub>	OE	ī	3.7	6.3	9.2	3.7	10.4	3.7	10.2	ns
<sup>t</sup> PHZ	ŌĒ	V	1.6	3.6	5.5	1.6	6.5	1.6	6.3	200
tPLZ		l <sup>Y</sup>	3.1	5.3	7.8	3.1	9.5	3.1	8.4	ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.









#### PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Packag Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
SN74BCT25244DW	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74BCT25244DWE4	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74BCT25244DWG4	ACTIVE	SOIC	DW	24	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74BCT25244DWR	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74BCT25244DWRE4	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74BCT25244DWRG4	ACTIVE	SOIC	DW	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74BCT25244NSR	ACTIVE	SO	NS	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74BCT25244NSRE4	ACTIVE	SO	NS	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74BCT25244NSRG4	ACTIVE	SO	NS	24	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74BCT25244NT	ACTIVE	PDIP	NT	24	15	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74BCT25244NTE4	ACTIVE	PDIP	NT	24	15	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI



### **PACKAGE OPTION ADDENDUM**

18-Sep-2008

www.ti.com	18-Sep-200
to Customer on an annual basis.	



#### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing			Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74BCT25244DWR	SOIC	DW	24	2000	330.0	24.4	10.75	15.7	2.7	12.0	24.0	Q1
SN74BCT25244NSR	SO	NS	24	2000	330.0	24.4	8.2	15.4	2.5	12.0	24.0	Q1





\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74BCT25244DWR	SOIC	DW	24	2000	346.0	346.0	41.0
SN74BCT25244NSR	SO	NS	24	2000	346.0	346.0	41.0

#### **MECHANICAL DATA**

#### NS (R-PDSO-G\*\*)

## 14-PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



NOTES:


- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



#### NT (R-PDIP-T\*\*)

#### PLASTIC DUAL-IN-LINE PACKAGE

#### **24 PINS SHOWN**

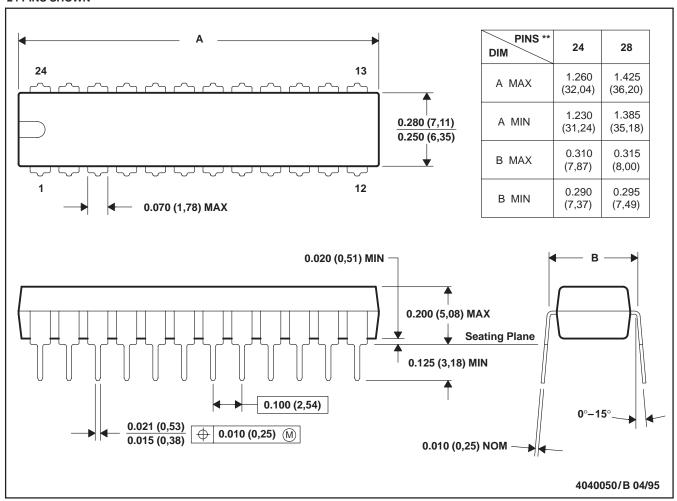

NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

## DW (R-PDSO-G24)

### PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AD.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

#### **Products Amplifiers** amplifier.ti.com Data Converters dataconverter.ti.com DSP dsp.ti.com Clocks and Timers www.ti.com/clocks Interface interface.ti.com Logic logic.ti.com Power Mgmt power.ti.com Microcontrollers microcontroller.ti.com www.ti-rfid.com RF/IF and ZigBee® Solutions www.ti.com/lprf

Applications	
Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2008, Texas Instruments Incorporated