

# XDSL SPLITTER FILTER MODULE



- ➊ POTS Central Office Splitter for standard ADSL and VDSL applications
- ➋ For use with ANSI T1.413 standard
- ➌ Part of a standard series with footprint compatibility
- ➍ Patent pending
- ➎ ADSL2+ compatible
- ➏ Compatible with VDSL2 30MHz
- ➐ NL version: RoHS-6 compliant



## Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

PARAMETER	FREQUENCY	
POTS Impedance	100Hz to 4kHz	800Ω    100Ω + 50nF
POTS Insertion Loss	1kHz	0.6dB MAX
POTS Attenuation Distortion relative to 1kHz <i>NOTE: Attenuation is positive value, gain is negative</i>	200Hz to 3.4kHz	-1.5 to +0.5dB
	3.4kHz to 4kHz	-1.5 to +1.0dB
POTS Delay Distortion	600Hz to 4kHz	200μSec MAX
POTS Return Loss	200Hz (SRL-L)	5dB MIN
	1kHz (ERL)	8dB MIN
	2.2kHz (SRL-H)	5dB MIN
intermodulation Distortion (2nd and 3rd harmonics)	4-Tone IEEE 743 signal	-60dB MIN
Longitudinal Balance	200Hz to 3.2kHz	-58dB MIN
Tip to Ring Capacitance	20Hz to 30Hz	115nF MAX
VDSL Insertion Loss	30kHz to 300kHz	-65dB MIN
	300kHz to 30MHz	-55dB MIN
DC Current		100mA MAX
Total DC Resistance		25Ω MAX
Tip to Ring Isolation		600Vdc MIN

## Mechanical

## Schematic

### BX8214V / BX8214VNL

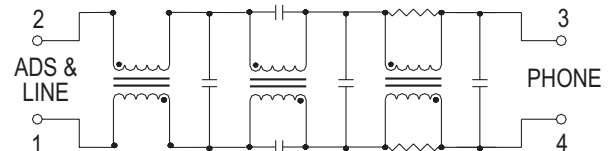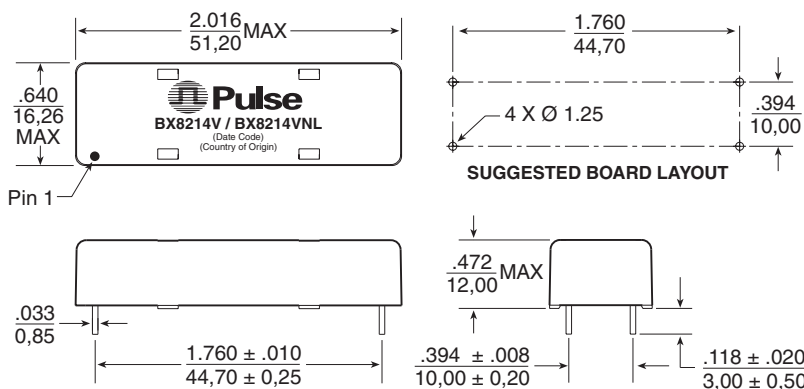

Weight .....15 grams  
Tray ..... .35/tray

Dimensions: Inches  
mm

Unless otherwise specified,  
all tolerances are ± .004  
0,10

## For More Information:

### Pulse Worldwide Headquarters

12220 World Trade Dr.  
San Diego, CA 92128  
U.S.A.  
[www.pulseeng.com](http://www.pulseeng.com)

Tel: 858 674 8100  
Fax: 858 674 8262

### Pulse Europe

Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

Tel: 49 7032 7806 0  
Fax: 49 7032 7806 12

### Pulse China Headquarters

B402, Shenzhen  
Tech-Innovation International  
Tenth Kejianan Rd.  
High-Tech Industrial Park  
Nanshan District, Shenzhen  
China

Tel: 86 755 33966678  
Fax: 86 755 33966700

### Pulse North China

Room 1503  
XinYin Building  
No. 888 YiShan Rd.  
Shanghai 200233  
China

Tel: 86 21 54643211/2  
Fax: 86 21 54643210

### Pulse South Asia

150 Kampong Ampat  
#07-01/02  
KA Centre  
Singapore 368324

Tel: 65 6287 8998  
Fax: 65 6280 0080

### Pulse North Asia

No. 26  
Kao Ching Rd.  
Yang Mei Chen  
Taoyuan Hsien  
Taiwan, R. O. C.

Tel: 886 3 4641811  
Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2007. Pulse Engineering, Inc. All rights reserved.