




CLT25F-C20

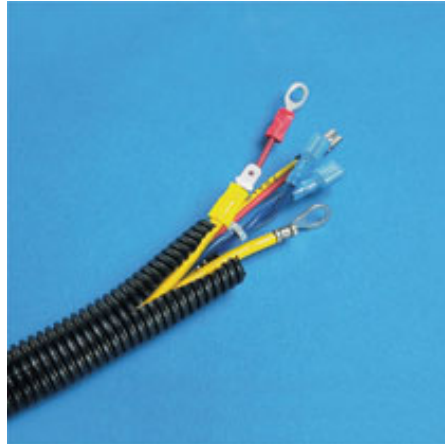

- Corrugated Loom Tubing is offered for applications where spiral wrap or braided expandable sleeving may be difficult to install or where they do not offer the amount of protection required. This version features a lengthwise slit which makes it easy to install onto a bundle of wires or a pre-assembled harness assembly.
- Protects and reduces the risk of damage to wiring
- Crush impact and abrasion resistant
- Slit wall design for ease of installation
- Hold in place with push type cable ties adhesive or push type mount
- Bundle wires in control panels
- * Order number of reels required.
Contact Customer Service for additional sizes, materials, colors and bulk packaging.

Part Number	CLT25F-C20
RoHS Compliancy Status	Compliant
Part Description	Slit corrugated loom tubing is offered for applications where Spiral Wrap or Braided Expandable Sleeving may be difficult to install or they do not offer the amount of protection required.
Material	Polyethylene
Color	Black
Flammability Rating	UL94 HB
Ft. Per Pkg.	100
Inside Diameter (In.)	.27
Inside Diameter (mm)	6.7
Length Per Reel (ft.)	100
Length Per Reel (m)	30.5
Outside Diameter (In.)	.39
Outside Diameter (mm)	9.9
Pricing Description	Corr. Loom Tubing Slit, .25" (6.4mm) x 100', Black
Temperature Range	-40°F to 122°F (-40°C to 50°C)
Min. Order UOM	RL
Min. Order Qty.	1
BOM Qty. (# of Pkgs.)	
Add to Favorite Product List	