THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECO-09-005756	15APR2009	ZMR	SLB

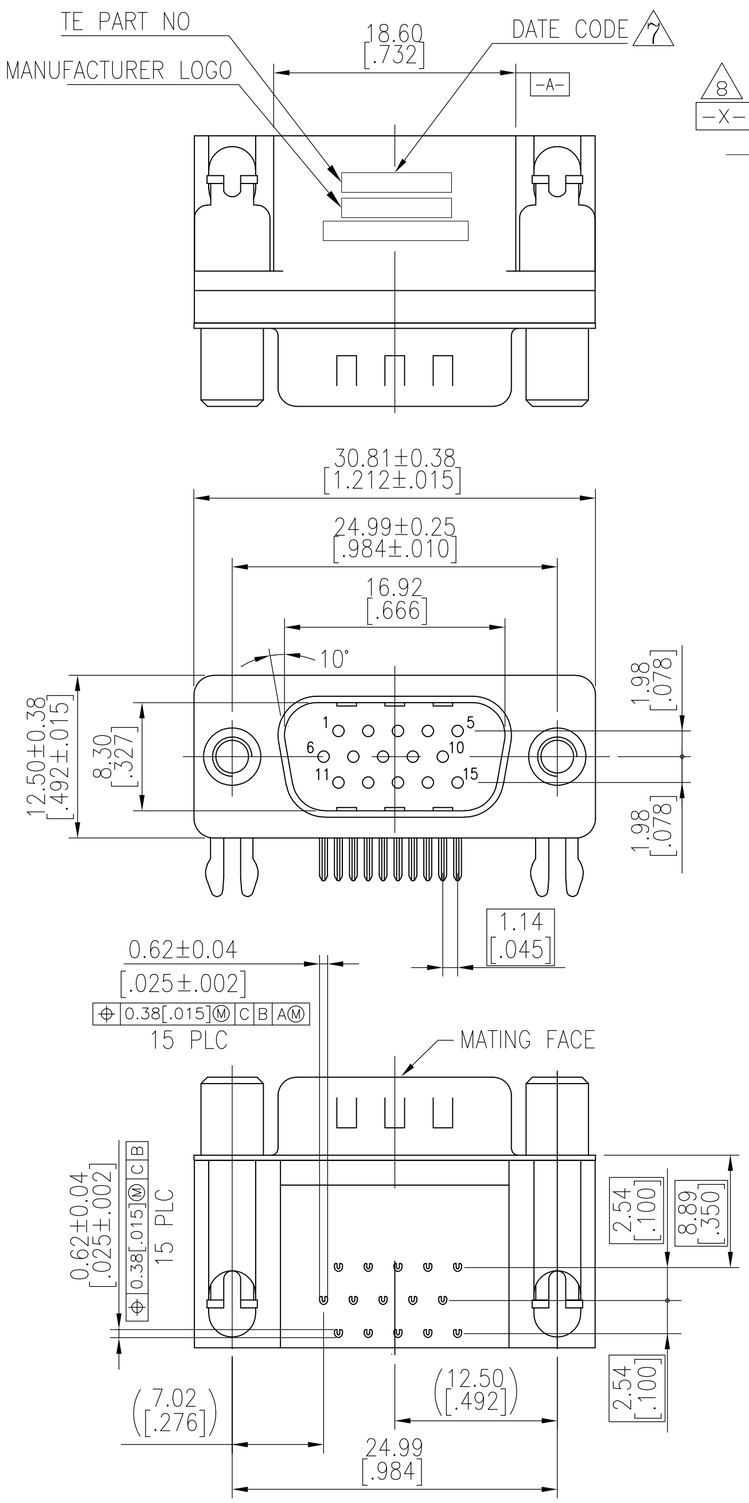

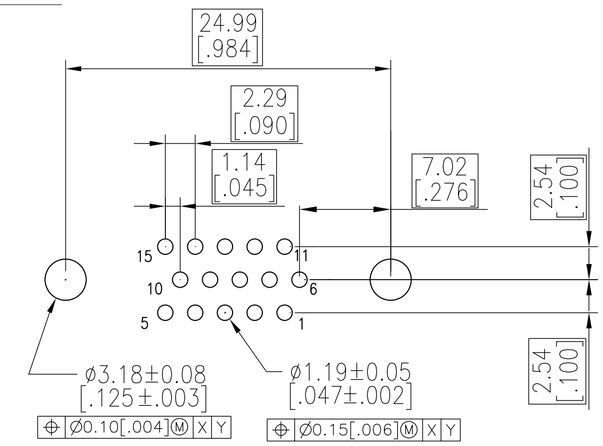

RECOMMENDED PCB LAYOUT

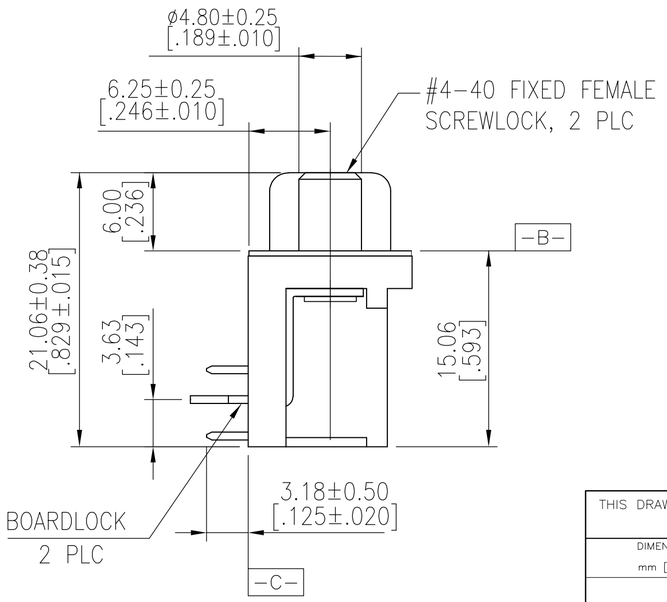

1. HOUSING MATERIAL: PBT, GLASS FILLED, BLACK, UL 94V-0 RATED.
2. CONTACT MATERIAL: PHOSPHOR BRONZE.
3. CONTACT FINISH: GOLD PLATE IN MATING AREA (SEE TABLE), 120µ" MIN TIN PLATE ON SOLDER TAIL, BOTH OVER 50µ" MIN NICKEL UNDERPLATE.
4. SHELL: STEEL, NICKEL PLATE.
5. BOARDLOCK: BRASS, 100µ" MIN TIN PLATE.
6. FEMALE SCREWLOCK: BRASS, NICKEL PLATE.

7 FOUR DIGIT DATE CODE IN THIS FORMAT.

01 45
Year — Manufacturing Week

8 DATUMS -X- & -Y- TO BE ESTABLISHED BY CUSTOMER.

OBSOLETE	Gold Flash	5749768-3
OBSOLETE	15µ" MIN	5749768-2
	30µ" MIN	5749768-1
	CONTACT MATING AREA FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± 0.38 [.015]
2 PLC ± 0.25 [.010]
3 PLC ± 0.15 [.006]
4 PLC ± -
ANGLES ± 2°

MATERIAL: SEE NOTES
FINISH: SEE NOTES

DWN	J.GERACE 22FEB06
CHK	S.BOLASH 22FEB06
APVD	M.WALMSLEY 22FEB06
PRODUCT SPEC	108-1092
APPLICATION SPEC	114-13198
WEIGHT	-

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME: AMPLIMITE HD-22 15 POS PLUG, RIGHT ANGLE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-5749768	-

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV C

5749768