


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		P		REV PER ECO-07-003710	21FEB07	KW	DB
		P1		REVISED PER ECO-09-023313	13OCT09	KK	AEG



YES	DIM A	NO. OF CIRCUITS	PART NO.
YES	71.12[2.800]	28	5-640468-8
YES	68.58[2.700]	27	5-640468-7
YES	66.04[2.600]	26	5-640468-6
YES	63.50[2.500]	25	5-640468-5
YES	60.96[2.400]	24	5-640468-4
YES	58.42[2.300]	23	5-640468-3
YES	55.88[2.200]	22	5-640468-2
YES	53.34[2.100]	21	5-640468-1
YES	50.80[2.000]	20	5-640468-0
YES	48.26[1.900]	19	4-640468-9
YES	45.72[1.800]	18	4-640468-8
YES	43.18[1.700]	17	4-640468-7
YES	40.64[1.600]	16	4-640468-6
YES	38.10[1.500]	15	4-640468-5
YES	35.56[1.400]	14	4-640468-4
YES	33.02[1.300]	13	4-640468-3
YES	30.48[1.200]	12	4-640468-2
YES	27.94[1.100]	11	4-640468-1
YES	25.40[1.000]	10	4-640468-0
YES	22.86[.900]	9	3-640468-9
YES	20.32[.800]	8	3-640468-8
YES	17.78[.700]	7	3-640468-7
YES	15.24[.600]	6	3-640468-6
YES	12.70[.500]	5	3-640468-5
YES	10.16[.400]	4	3-640468-4
YES	7.62[.300]	3	3-640468-3
YES	5.08[.200]	2	3-640468-2

NO	DIM A	NO. OF CIRCUITS	PART NO.
NO	71.12[2.800]	28	2-640468-8
NO	68.58[2.700]	27	2-640468-7
NO	66.04[2.600]	26	2-640468-6
NO	63.50[2.500]	25	2-640468-5
NO	60.96[2.400]	24	2-640468-4
NO	58.42[2.300]	23	2-640468-3
NO	55.88[2.200]	22	2-640468-2
NO	53.34[2.100]	21	2-640468-1
NO	50.80[2.000]	20	2-640468-0
NO	48.26[1.900]	19	1-640468-9
NO	45.72[1.800]	18	1-640468-8
NO	43.18[1.700]	17	1-640468-7
NO	40.64[1.600]	16	1-640468-6
NO	38.10[1.500]	15	1-640468-5
NO	35.56[1.400]	14	1-640468-4
NO	33.02[1.300]	13	1-640468-3
NO	30.48[1.200]	12	1-640468-2
NO	27.94[1.100]	11	1-640468-1
NO	25.40[1.000]	10	1-640468-0
NO	22.86[.900]	9	640468-9
NO	20.32[.800]	8	640468-8
NO	17.78[.700]	7	640468-7
NO	15.24[.600]	6	640468-6
NO	12.70[.500]	5	640468-5
NO	10.16[.400]	4	640468-4
NO	7.62[.300]	3	640468-3
NO	5.08[.200]	2	640468-2

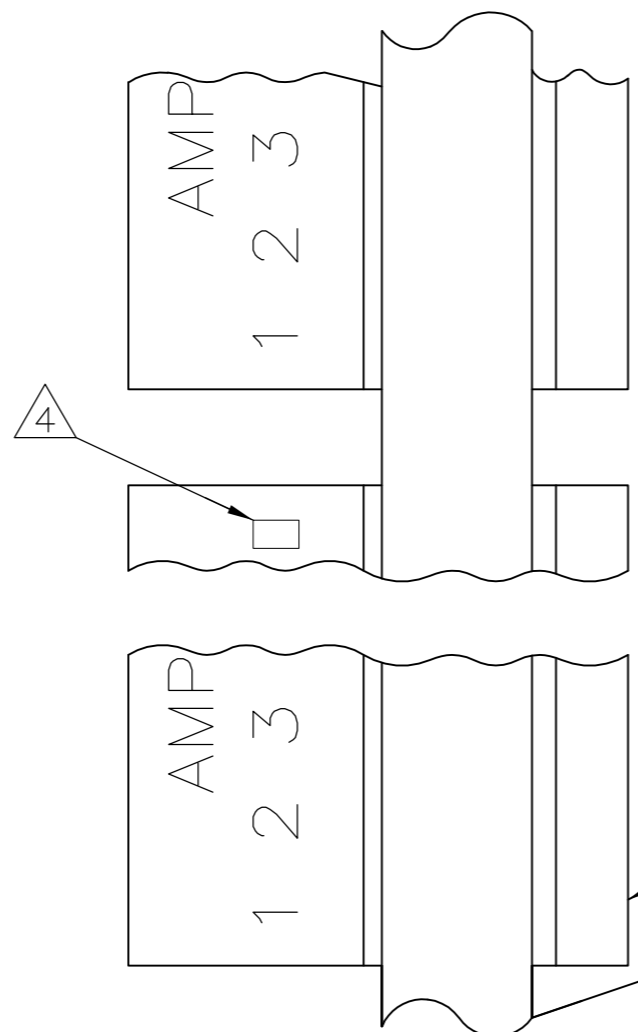

SUPERCEDED 

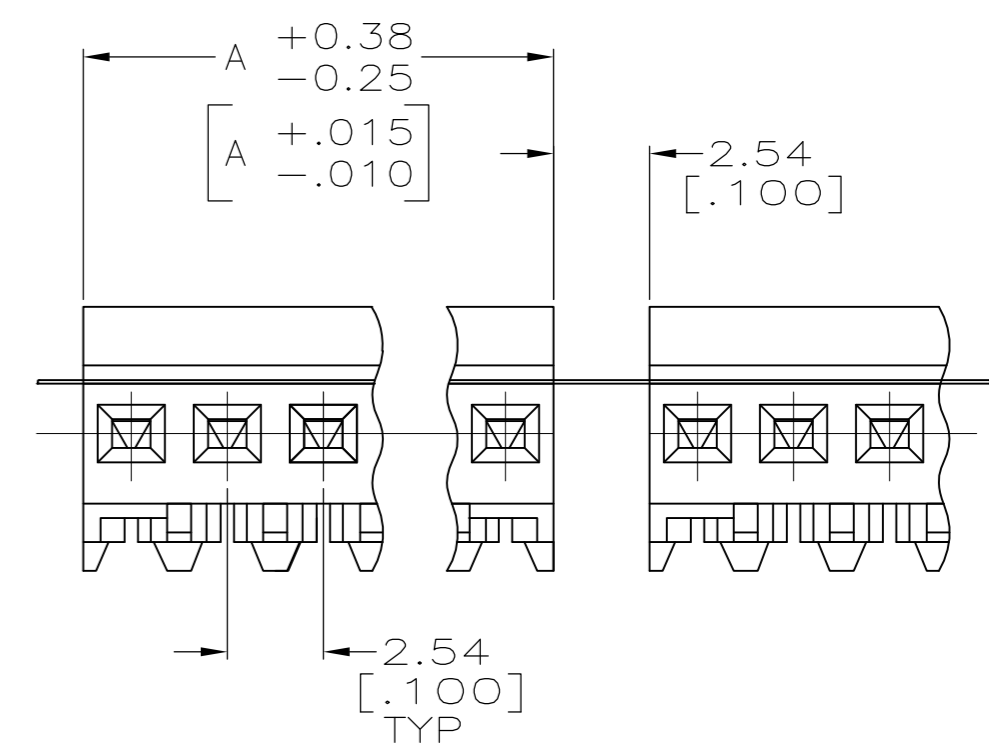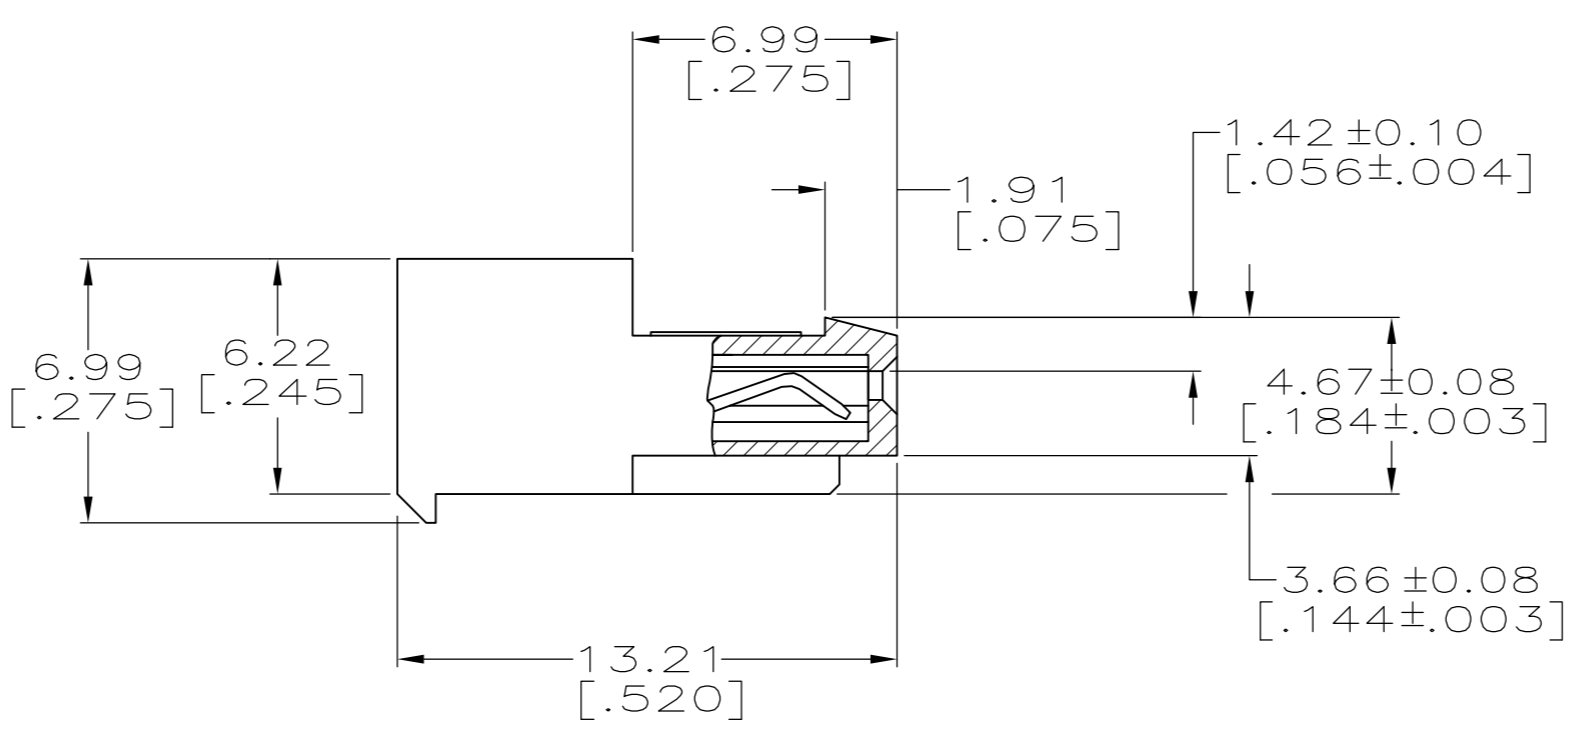

-  MATERIAL: CONNECTOR - NYLON UL94-V2 (RED)
 CONTACTS - 0.30[.012] THICK COPPER ALLOY
 BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK
 FOR CONTACTS 640468-2 THRU 2-640468-8.
 MATTE WHISKER MITIGATED TIN PLATE 0.00203[.000080] MIN. THICK
 OVER NICKEL UNDERPLATE FOR CONTACTS 3-640468-2 THRU 5-640468-8.
- 2. CONTACTS ACCEPT 22 AWG WIRE WITH 1.52[.060] MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 0.64±0.03[.025 ±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
-  IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP.
-  OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER 08AUG2003	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK D. BOSSI 08AUG2003	NAME MTA-100 CONNECTOR ASSEMBLY, 22 AWG, STANDARD, TAPE MOUNTED	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 0.13 [.005] 4 PLC ± ANGLES ±		APVD D. BOSSI 08AUG2003	PRODUCT SPEC 108-1050	
MATERIAL 		FINISH 	APPLICATION SPEC 114-1019	RESTRICTED TO -
CUSTOMER DRAWING		WEIGHT	SIZE A2	CAGE CODE 00779
SCALE 5:1		DRAWING NO C-640468		SHEET 1 OF 1
REV P1				